

BEEBECO



BEE STROLLER INSTRUCTION MANUAL

- Premium Aluminum Frame
- 5 Point Safety Harness
- Reversible & Removable Carry Cot
- Wheels With Suspension

Before using the stroller read the manual thoroughly and carefully.
Keep the manual handy for any future reference

Instructions for use

Instructions concerning safe use of the vehicle shall be provided in the form of instruction sheet, instruction manual, leaflet or other similar physical support. These instructions shall include at least the

following and shall be headed as follows:

“IMPORTANT - READ CAREFULLY AND KEEP FOR FUTURE REFERENCE”

10.4.1 The following warnings shall be provided, in the form given.

- “WARNING Never leave the child unattended.”
- “WARNING Ensure that all the locking devices are engaged before use.”
- “WARNING To avoid injury ensure that the child is kept away when unfolding and folding this product.”
- “WARNING Do not let the child play with this product”
- For pram bodies having a length greater than 800 mm: “WARNING Use a harness as soon as the child can sit unaided.”
- If applicable: “WARNING This seat unit is not suitable for children under 6 months”
- If applicable “WARNING Always use the restraint system”
- “WARNING Check that the pram body or seat unit or car seat attachment devices are correctly engaged before use.”
- “WARNING This product is not suitable for running or skating.”

The word “WARNING” can be given at the top of a list of warnings.

10.4.2 The following information shall be given.

- The name or trade mark of the manufacturer, importer or organization responsible for its sale.
- Means to identify the product.

- Information concerning the maximum weight of the child for which the vehicle is suitable up to: 15 kg.
- Pushchair designed to be used from birth shall recommend the use of the most reclined position for new born babies.
- Instructions for initial assembly, folding and erection, if applicable.
- A statement of compatibility between chassis and pram body and/or seat unit and/or car seat, if applicable.
- Instructions for pram bodies shall indicate the maximum height of the mattress, to ensure compliance with the minimum internal height requirements (see 8.1.2.1) unless a mattress is provided. In that case, the manufacturer shall clearly indicate that no additional mattress shall be added unless recommended by the manufacturer.
- Instructions covering all functions of the vehicle.
- Instructions for operating parking and/or braking device(s).
- An instruction that the parking device shall be engaged when placing and removing the children.
- For vehicles fitted with load carrying accessory (ies), details of the maximum permissible load.
- A statement that any load attached to the handle and/or on the back of the backrest and/or on the sides of the vehicle will affect the stability of the vehicle.
- Instructions for routine inspection, maintenance, cleaning and/or washing.
- A statement that the vehicle shall be used only for up to the number of children for which it has been designed.
- Any additional seat shall clearly indicate its compatibility to a specific vehicle.
- A statement that accessories which are not approved by the manufacturer shall not be used.


- If fasteners and adjustment devices of a restraint system are removable information on how to reassemble them.
- Instructions for the use or not of the restraint system if the seat unit is suitable for use from birth, including how to remove, to cover or to hide the restraint system for vehicles complying with 8.1.1.1.1 b).
- Instructions for use of the harness attachment points and any integral harness.
- Any other information for safe usage if relevant.
- Instruction concerning safe use of a platform together with an indication of weight of the child (up to 20 kg)
- For pram bodies with a length less than 800 mm, a statement that the product shall not be used, as soon as the child is able to sit by himself, roll over and can push itself up on its hands and knees.

Maximum weight of the child: 9 kg

This requirement does not apply to pram bodies that have the function of child restrain systems

- For pram bodies, a statement that carrying handles shall be left out of the pram body during use.
- For car seats used in conjunction with a chassis, this vehicle does not replace a cot or a bed. Should your child need to sleep, then it should be placed in a suitable pram body, cot or bed.
- Only replacement parts supplied or recommended by the manufacturer/distributor shall be used.


Component:

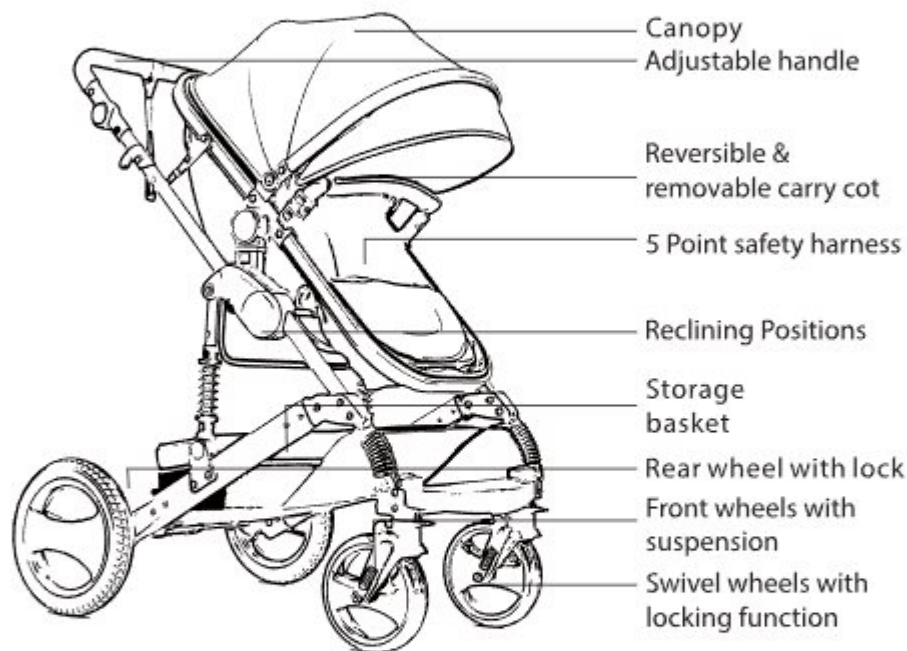

Assembly Instructions:


Unfold the Baby Stroller


- Take the stroller out of the package as shown in Fig. 1a
- Unfold the folding hook, pull the handlebar and gradually push to open the stroller until a "click" sound is heard as shown in Fig. 1b and 1c

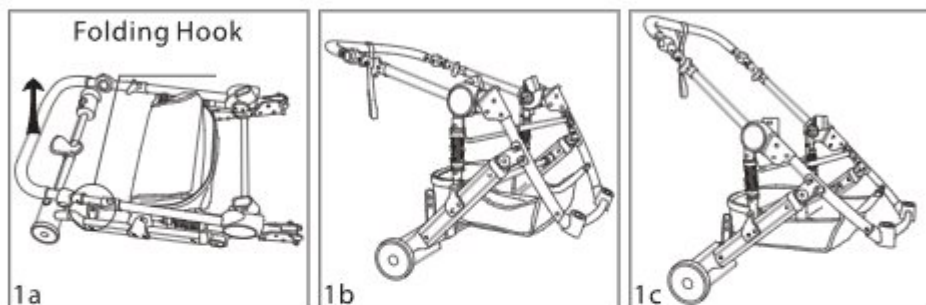

Install the Front Wheels


As shown in Fig. 2, attach each wheel to the front wheel axle till a "click" sound is heard.

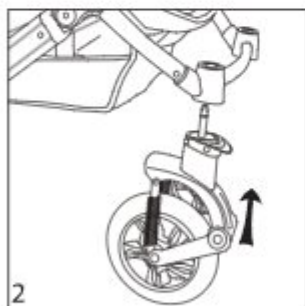

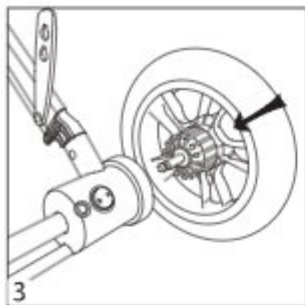

Install the Rear wheel

As shown in Fig. 3, insert the rear wheels into the rear wheel axle till a "click" sound is heard and ensure the rear wheels are locked and cannot be pulled out.


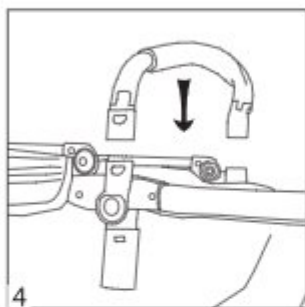


Install the Bumper Rail or Handrail

As shown in Fig. 4, insert the rail into the body of unit and press down till a "click" sound is heard.


Carry Cot Installation

The carry cot comes pre-assembled. Plug it on to the adapters as shown in Fig 5a and 5b.

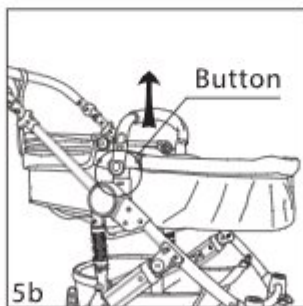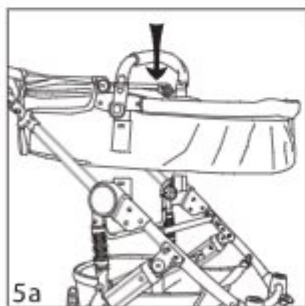






Seat Adjustment

The position of the seat can be adjusted with the help of buttons present on the stroller. Buckle the belt at the back, as shown in Fig. 6a
Buckle the belt on both sides of the carry cot as shown in Fig. 6b
Press the side buttons and adjust the carry cot as shown in Fig. 6c

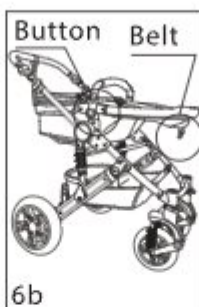

Seat Reversal

To reverse the seat just disconnect the carry cot from the frame by pressing down the two side buttons, change its direction and fix it onto the connectors again as shown in Fig. 7a, 7b, 7c and 7d.

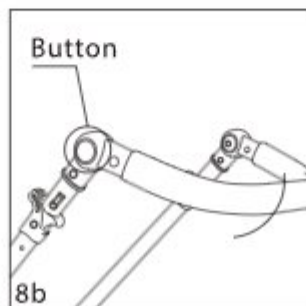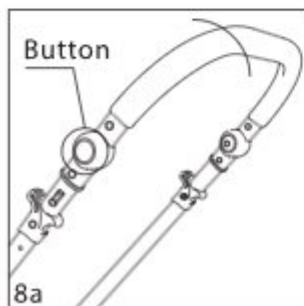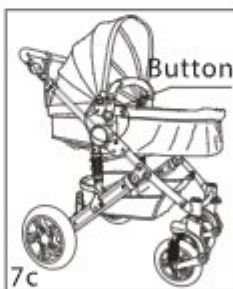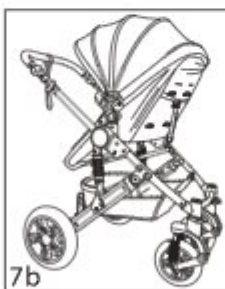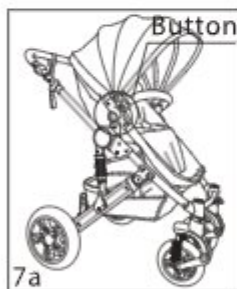

Handle Height Adjustment


Press the buttons on both sides of the handle to adjust handle height as shown in Fig. 8a and 8b.

Canopy

As shown in Fig. 9a, 9b, 9c, 9d and 9e the canopy can be folded or unfolded by pushing or pulling its front edge backward or forward.



9a

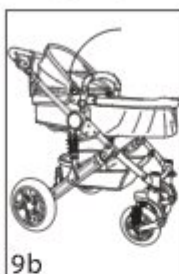

9b




9c



9d




9e

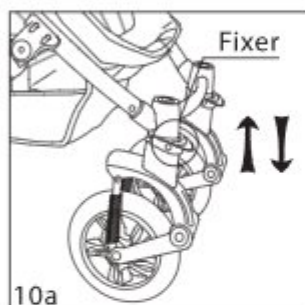

10a

Front Swivel Wheel

If the fixed clip is raised, the front wheels will swivel. If the fixed clips are pushed down, the front wheels can't swivel around the front pipe as shown in Fig. 10a.

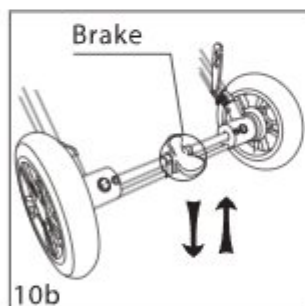


10b

Using the Rear Wheel Brakes

Use your feet to lift the brake pole upward to release the brakes, and push it downward to apply the brakes as shown in Fig. 10b.


Safety Harness

- The belt comes in three parts. Simply insert the male parts on the shoulder and side belts into the female part of the crotch belt and press slightly to lock as shown in Fig. 11a, 11b, 11c & 11d
- To disengage the lock, press the button on the belt and then pull apart
- The safety harness can be removed while the baby is between the ages of 0 to 6 months and generally lies in the carry cot as shown in Fig 11e
- When the child learns to sit up, the safety harness can be installed as shown in Fig 11f, 11g, 11h
- As shown in Fig 11i, the safety harness should always be used for children aged between 6 to 36 months

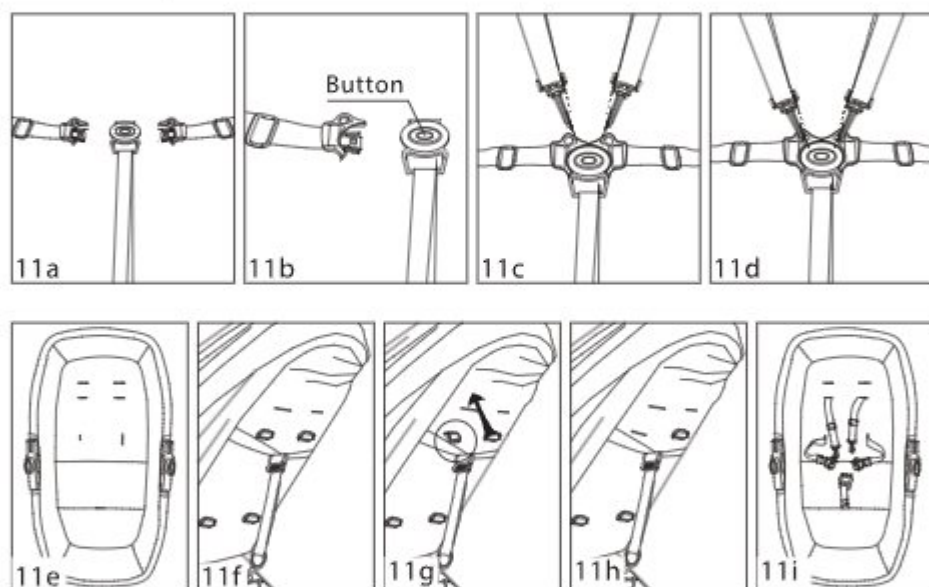

Folding Instructions


- Brake the rear wheels and stop the swiveling of the front wheels by drawing the clip
- Remove the carrycot from the stroller as shown in Fig. 12a
- Unlock the second lock as shown in Fig. 12b
- As shown in the Fig. 12c, slide rings and press down the handle at the same time
- As shown in the Fig. 12 d and 12 e, put the folding hook in place to keep it compact

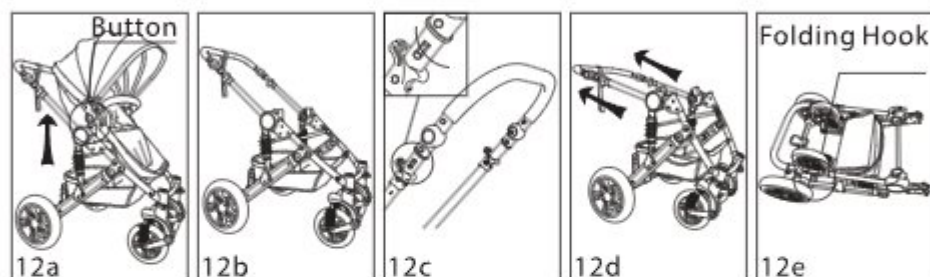

Dismantling the Stroller :

How to Remove :

- **Bumper Rail or Handrail** - Press down the side buttons and remove the rail as shown in Fig.13
- **Front Wheels** - Press the button on the wheels with one hand, as shown in Fig.14, and remove the front wheels with the other hand
- **Rear Wheels** - Press the button on the wheels with one hand, as shown in Fig.15, and remove the rear wheels with the other hand

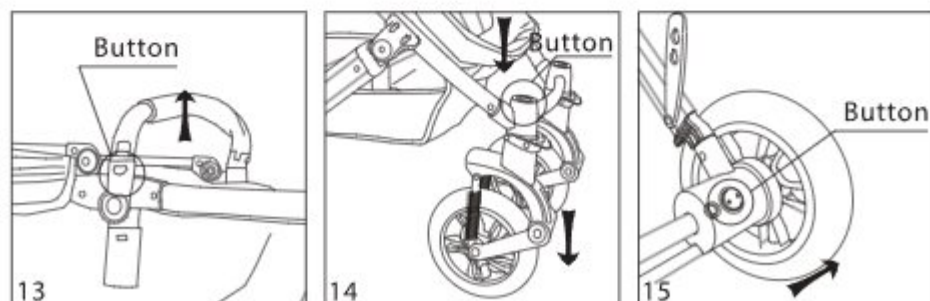

Warning

- Inspect the stroller properly every time before placing your baby in it
- Never leave your baby unattended in the stroller
- Do not hang or place anything so heavy on the handle that the stroller becomes prone to tipping over backwards
- Before use make sure all the locking devices are inspected and secure
- The stroller is designed for babies between 0 to 36 months (0 to 6 months while using as carry cot) and maximum carrying capacity is 15 kg (9 kg while using as carry cot)
- Objects in the net basket should not weigh more than 2 kg
- The product is not suitable for running or skating
- Always use the brake when the stroller is in stationary mode
- Keep the product away from fire
- Always use the product on smooth and even surface

Maintenance

- For cleaning the fabric, remove the screw and take it out of the stroller
- Wipe the fabric lightly with natural soap and cold water. Let it air dry
Babyhug liquid laundry detergent is best recommended
- Do not bleach, press or dry clean the fabric of the stroller
- Wipe the metal and plastic parts of the stroller with a wet cloth. Do not use harsh chemicals for cleaning
- Keep checking the stroller for loose screws, damaged parts or broken threads
- While dismantling or assembling the stroller, follow the instructions on the user manual carefully

Assembling The Car Seat On The Stroller Frame.

Place adapters in the opening on both sides of the seat until you hear the lock clicks.




When installing the car seat on the stroller, push it into the opening on each side of the frame, until you hear clicking sound of engaged lock. To remove the seat from the frame, pull the lever of the adapters on both sides of the stroller and remove the seat.



NOTE! The seat must be always installed on the frame with child's back to the direction of travel (the child should face the person pushing the stroller)



CAR SEAT INSTRUCTION MANUAL

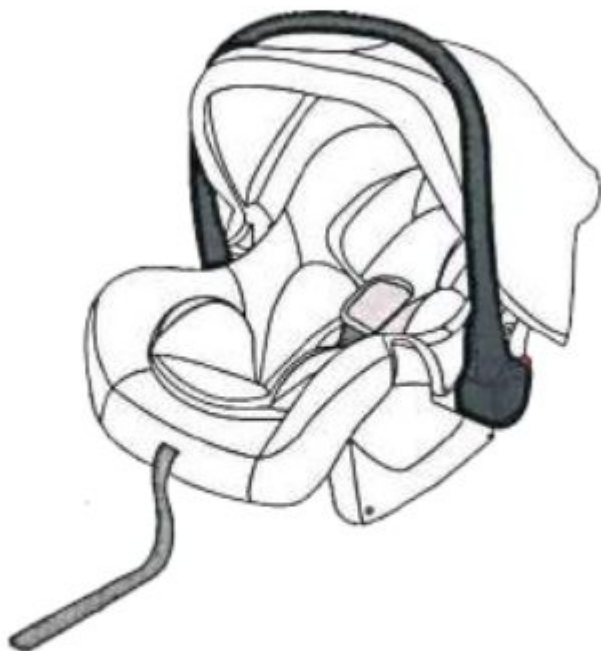

Group0+ (0-13kg) suitable from birth up to 13kgs

Congratulations on your purchase of the **INFANT SEAT**

This product has been designed and developed with safety, comfort and functionality in mind. Please take the time to read this manual carefully before using this product and keep it in a safe place for future reference.

NOTICE

1. This is a "Universal" child restraint; it is approved to Regulation No. 44,04 series of amendments, for general use in vehicles and it will fit most, but not all, car seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group.
3. This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.

Only suitable if the approved vehicles are fitted with 3-point
safety-belts, approved to UN/ECE
Regulation No.16 or other equivalent Standards.

EXTREME HAZARD

Do not use in passenger seats equipped with airbags (SRS)

Please read through these instructions carefully before using the infant seat for first time. The instructions can be retained on the infant seat for its life period.

Applicability:

The infant seat is suitable for weight categories 0+.



Group 0+: less than 13kg

WARNING

DO NOT use this rearward facing restraint in seating positions where an active frontal airbag is installed.

Your child seat can only be installed rearward facing (in the direction opposite the one in which you are travelling) with a 3 point safety harness.



Correct fitting/suitable




Incorrect fitting/not suitable

This child seat is suitable for conventional use in all cars equipped with 3-point seat belts that are fitted in accordance with European standard (ECE44 or equivalent standard)

Important:

This child seat must only be installed using a lap and diagonal seat belt.

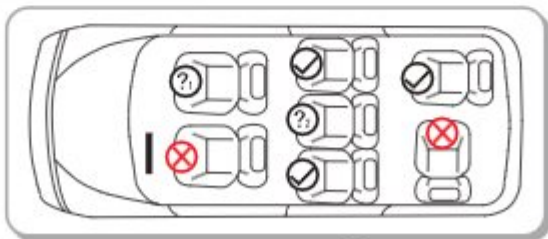

Not to be used on this seat if a passenger front airbag is active.



Only use on this seat if a lap and diagonal seat belt is fitted.


SAFETY WARNINGS



Please read this user guide carefully before install the child seat and for future reference.

- The instruction can be retrained on the child restraint for its life period .
- This child restraint must be used with the harness for children of less than 13kg in weight ,and heights less than 26 inches (66cm).
- This child restraint can only be installed rearward facing using a three-point lap and diagonal seat belt.
- Only suitable if the approve vehicles are fitted a 3-point safety belts with retractor, approved to UN/ECE Regulation No.16 or other equivalent Standards.
- Rigid items and plastic parts of a child restraint system must be likely located and installed so that they are not liable, during everyday use of the vehicle, to become trapped by a moveable seat or in a door of the vehicle.
- This rear-facing child restraint system can not be used in seating position where there is an airbag enabled.
- This "Special Needs Restraint" is designed to give extra support to children who have difficulty in sitting correctly in conventional seats. Always consult your doctor to make sure that this restraint system is suitable for your child.
- Ensure that the strap, holding the restraint to the vehicle, are as tight as possible. Make sure that the straps ,restrain the child at the correct height and are not twisted.
- In an event of an accident, the child restraint system **MUST BE REPLACED**.
- For maximum protection, the center rear seat position is recommended for the safest position in most vehicles for installing a child restraint. Only when the seat is provided with a 3-point adult belt.
- Your child restraint should not be purchased or sold as a second hand item.It is not recommended to use child restraint older than 6 years old as the protection in an accident may be reduced.
- This safest seating position for this child car seat is on the rear seat of a vehicle.
- It is dangerous to make any alterations or additions to the device without the approval of the competent authority , and a danger of not following closely the installation instructions provided by the child restraint manufacturer .
- Do not leave your child unattended in the seat at any time .
- Never use the child seat without fastening the child in it and without fastening it into the car.
- The seat should be kept away from sunlight if the seat is not provided with a textile cover, otherwise it may be too hot for the child's skin.
- In the event of an emergency it is important that the child can be released quickly .This means that the buckle is not fully tamper proof and so your child must be taught never to play with the buckle.

- Any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.
- Never use the seat as a shopping bag or as a means for transporting sometime.
- The child restraint can not be used without the cover. The seat cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.
- Periodically inspect the harness for wear , paying particular attention to attachment points , stitching and adjusting devices.
- Ensuring that any lap straps is worn low down , so that the pelvis is firmly engaged, shall be stressed.
- The seat device should be changed when it has been subject to violent stresses in an accident.
- Do not use any load bearing contact points other than those described in the instructions and marked in the child restraint.

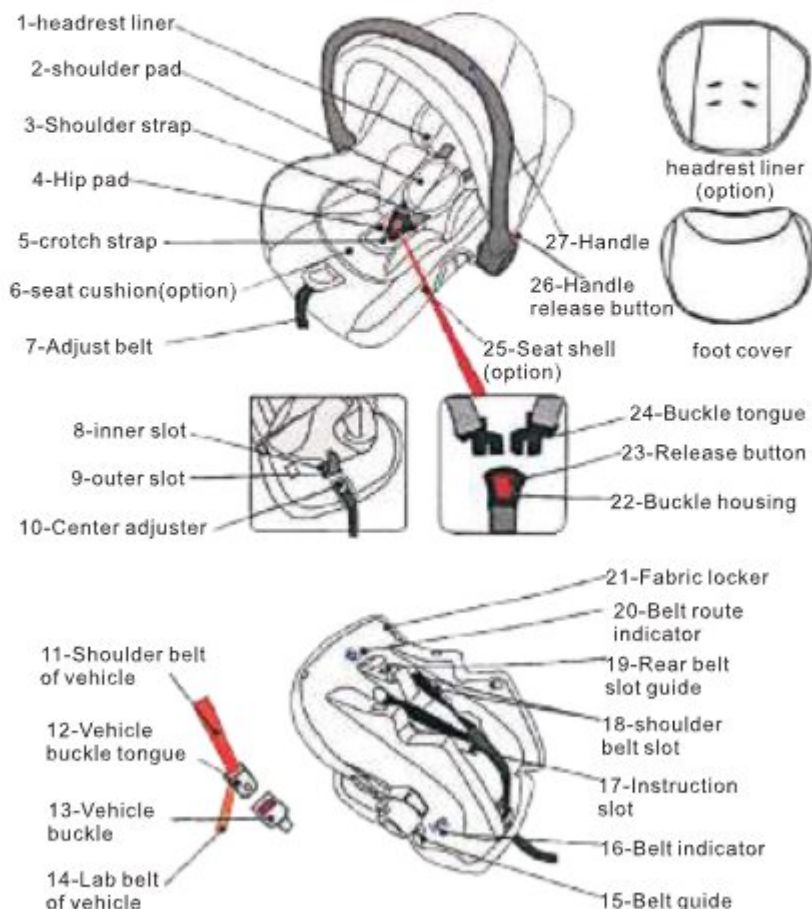

Tighten the shoulder harness



Pull the shoulder straps upwards to remove the whole harness then pull the adjuster strap until the harness is fully tightened.

To release the harness (see point AD JUSTING THE SHOULDER HEIGHT), press the red button on the buckle downwards. The harness should be adjusted as tightly as possible without causing discomfort to your child.

SECURING THE INFANT CARRIER

Please read the operating handbook in your vehicle to inform yourself about the basics concerning children's seat in vehicle .

DO NOT place this baby seat on seat with front airbags.

This baby car seat can only be installed using a three-point vehicle belt.

The baby car seat must be installed rearwards facing (in the direction opposite the one in which you are traveling) .

Step1



Step 1: Adjust the handle to the upright position .Place the child safety seat on the vehicle's seat ensuring it is firmly pressed against the car seat backrest.



Step2. Slide the lap belt of the vehicle's 3-point seatbelt through both Lap belt guides .Let the tongue plate snap in the belt lock with a clearly audible "click".Pull the shoulder belt in arrow direction to tighten the lap belt.Check to make sure the tongue plate is locked by pulling on the belt .

Step3.Place the diagonal belt in thediagonal belt guide at the back of the seat

Step4.Tighten the vehicle's own 3-pointseatbelt by pulling hard on the positions .

Step 5 : Adjust the handle to the forward position .Place the child safety seat on the vehicle's seat ensuring its handle must be firmly against the car seat backrest.

The satisfactory position of the adult safety-belt buckle relative to the child car seat is as the following picture. You can contact the child car seat manufacturer if in doubt about this point.



Make sure all the belts' position is right and they has not become twisted. Also check that the cover is not impeding the movement or fit of the belt webbing in any way.

To release your baby car seat following the above instructions in reverse order.

ADJUST THE HANDLE




The handle for the baby car seat can be adjusted into 4 stable positions. To adjust the handle ,please press the red button of handle on both sides at the same time .Now it can be adjusted.



①



②



③



④


The carry handle has four positions:

1. Forward facing installed in the car .This position (only this position) is suitable for the baby car seat installed on the vehicle seat .
2. Straight up for carrying .
3. Handle clicked back to initiate the rocking feature .
4. Down to support baby for feeding and play .

Ensure that the handle is locked in a position ,the harness is correctly fitted and buckle fastened before carrying your car seat.

CANOPY ASSEMBLY

1. Adjust the handle to the position same as the following picture
 2. Insert frame through sleeve of canopy.
 3. Insert both ends of canopy frame into the canopy frame joint parts which locate on the both side of the car seat and above the handle.
 - 4 Fix the bottom of the canopy cover to the top of the car seat back, see the following picture.
 5. Rotate the canopy frame joint parts and the canopy will reach the proper position you want.
 6. Rotate the handle and the handle will reach the proper position you want.
- When you do not need canopy just take off it in reverse order of the above instruction.

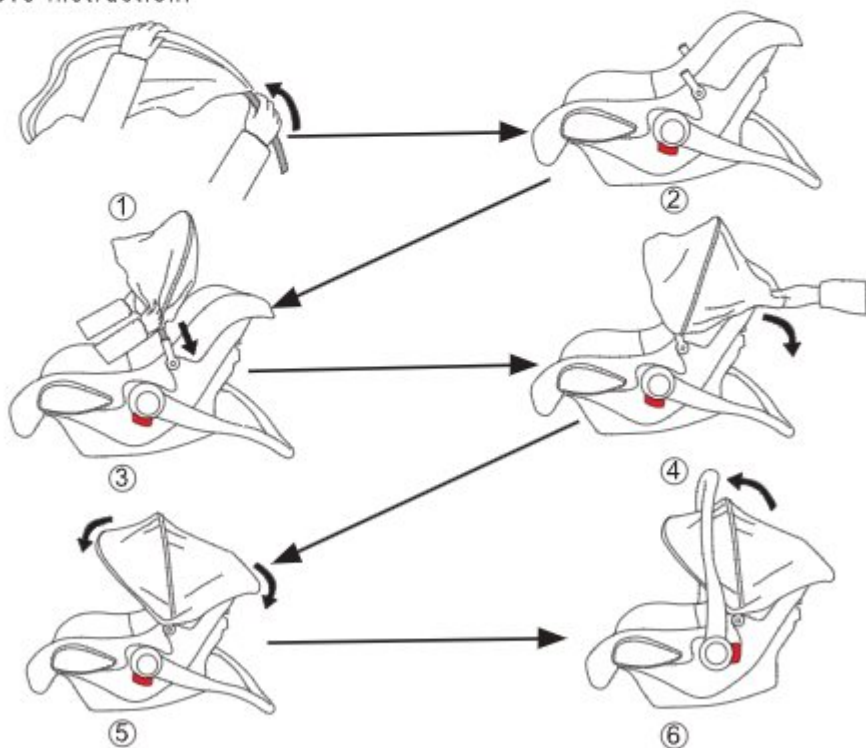

Cleaning & maintenance:

These instructions are important .Please read carefully and retain for future reference.

The child restraint can not be used without the cover.

The seat cover should not be replaced without one recommended by the manufacturer .Because the cover constitutes an integral part of the restraint performance.

Don't use any car seat again after impact or accident.






Please remove the car seat out of vehicle when it is not used and keep out reach of child.

Please always fasten the car seat when it is inside the vehicle.

Please always read the manual before use it, and the manual is locate in the back of car seat, under the cover bag.

Washing instruction:

The cover is removable and washable at 30 °C ,line dry only.

				
Machine wash, cold	Do not bleach	Dry clean, any solvent except trichloroethylene	Do not tumble dry	Do not iron

If you are in doubt about using or fitting of this product or you require any replacement parts ,please contact our customer hotline.

European safety child seat is sweeping the whole world now




European safety standard

Dimension Info



LENGTH	85 CM	FOLDABLE LENGT	93 CM
WIDTH	62 CM	FOLDABLE WIDTH	62 CM
HEIGHT	109 CM	FOLDABLE HEIGHT	42 CM

WEIGHT 12.64 KGS

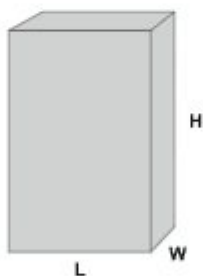

CARTON LENGTH	50 CM
CARTON WIDTH	28 CM
CARTON HEIGHT	83 CM
