

ChelinoBaby®

Stores: ChelinoBaby – Ormonde – JHB
ChelinoBaby – Fourways – JHB
ChelinoBaby – Greenstone – JHB
ChelinoBaby – Menlyn – Pretoria
ChelinoBaby – Kolonnade – Pretoria
ChelinoBaby – Centurion – Pretoria
ChelinoBaby – Gateway – Durban
ChelinoBaby – Online – www.chelinobaby.co.za



Imported for :
ChelinoBaby Group of Companies.
No. 12 Kimberlite Road , Theta Ext 5 ,
Booyens Reserve , JHB , 2091. SA.
Tel: +2711 8352520
Info: info@chelino.co.za

Chelino

ARIES II INSTRUCTION MANUAL



Please read the instruction manual
before using the child car seat

Group II,III
Group II: 15kg-25kg(approx.3 years -7 years)
Group III: 22kg-36kg(approx.6 years -12 years)
Universal ECE R44/04

Due to variation on the styles and designs of our products, the photographs and illustrations shown in this manual are generic. Therefore products fabric, colour and design may vary from images shown, Chelino reserves the right to alter products specifications

Table of Contents:

1. Introduction.....	2
2. Suitability.....	2
3. Safety advice.....	3
4. Vehicle application.....	4
5. Components overview.....	4
6. Adjusting the headrest to the size of your child.....	4
7. Installing your child car seat and securing your child for Group II(15kg-25kg).....	5
8. Installing your child car seat and securing your child for Group III (22kg-36kg).....	6
9. Removing the cover.....	7
10. Assembling the car seat.....	7
11. Cleaning the cover.....	7

1. Introduction

Thank you for choosing our child car seat. In order to gain the most comprehensive protection of your child, please read carefully and follow the instruction for correct installation and retain for future use. If you have any questions, please contact us.

This is a "universal" child car seat. The product can only be used in vehicle that is fitted with 3-point safety belt approved to ECE-16 or the equivalent standard.

2. Suitability

The child car seat is suitable for children from 15kg to 36kg, for details please see below:

Group II: 15kg(3 years) to 25kg(7 years)

Group III: 22kg(6 years) to 36kg(12 years)

The product can only be used in vehicle that is fitted with 3-point safety belt approved to ECE-16 or the equivalent standard. Never use a 2 point safety. The car seat must only be installed by using a lap and diagonal seat belt.





3. Safety advice


- (1). Please read the entire instruction manual thoroughly before using the child car seat. Improper installation can endanger the life of your child.
- (2). Under no circumstances should the seat be installed on a passenger seat equipped with an airbag. This can be very dangerous.
- (3). It is most important that the seat belt is correctly routed.
- (4). Never make unauthorized alterations or additions to the product.
- (5). Never use the child car seat if it has been in an accident, or if it has become badly worn.
- (6). Do not leave your children in the seat unattended at any time.
- (7). Child car seat parts may become hot in direct sunlight. Cover with a sheet to prevent this.
- (8). Make sure that your child never plays with the buckle as the buckle is not fully tamperproof.
- (9). Ensure that all other passengers, luggage and loose objects are properly secured.
- (10). Never use the child car seat without cover. Only covers approved by manufacturer can be used.
- (11). The child car seat must be secured with the car seat belt when not in use.
- (12). In an emergency your child can be released quickly by pressing the red button on the seat belt buckle.
- (13). Store this child car seat in a safe place when it is not being used. Avoid placing heavy objects on it.
- (14). Most accidents occur on short trips, so do not be tempted to avoid using the seat simply because you are not travelling very far.
- (15). Make sure to keep plastic bag long distance from your child as it is likely to cause suffocation.
- (16). Do not expose the child car seat to any corrosive substance. Use wet towel to clean the plastic body instead of any solvent when the plastic body is dirty.
- (17). Make sure the child car seat belt is adjusted to suitable position and the belt can't be twisted.
- (18). It's very important to put any lap belt low down so that the pelvis is firmly stressed.
- (19). Do not use this product second hand as you never know its history.
- (20). The rigid items and plastic parts of a child restraint must be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle
- (21). If position of the adult safety-belt buckle relative to the main load bearing contact points on the child safety seat is unsatisfactory. Please contact the manufacturer if in doubt about this point.
- (22). Not to use any load bearing contact points other than those described in the instructions and marked in the child restraint.

4. Vehicle Application:




 Not allowed to install child car seat.

 Be careful to install child car seat. Installation is permitted only if there is 3-point belt.
NOT TO USE REARWARD FACING SYSTEMS IN SEATING POSITIONS WHERE THERE IS AN AIRBAG INSTALLED.

 Safe to install child car seat.

5. Components overview

- A-Headrest cover
- B-Backrest
- C-Belt guide
(for group II , child from 3-7 years old)
- D-Headrest
- E-Seat base
- F-Belt guide
(for group II ,child from 3-7 years old)
- G-Rotate bar

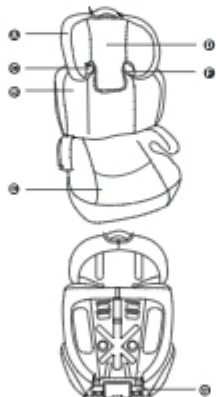

6. Adjusting the headrest

Pull or push the hole of the headrest to adjust the height of the headrest.



7. Installing your child car seat and securing your child for Group II(15kg-25kg)

installation method: use 3-point seat belt fix baby and baby car seat.

7.1 Adjust backrest to make sure it touches carseat closely.
 Put the car seat on car seat facing forward and adjust the backrest along the Rotate bar(G) to make the backrest touch closely the carseat.



7.2 Place your child in the child car seat.

7.3 Route the diagonal and lap belts correctly

7.3.1 Make sure there is no twist of car belt. Route the diagonal belt through the belt guide(C,F) for child in the meanwhile, route lap belt under armrest on seat base.



7.3.2 Make sure that both diagonal and lap belt must go under armrest.



7.3.3 Check and make sure there is no twist of the belt. Insert the metal tongue of car belt into the carseat buckle until you hear a clear "click".



Warning! If your child's head grows out car seat headrest, please use the car seat as booster for Group III.

8. Installing your child car seat and securing your child for Group III (22kg-36kg)

8.1 Removing the backrest

8.1.1 Push backrest and seat unit apart. The seat may click loudly. The two sections should come apart. Reattach the Velcro tab at the back of the booster seat if it has come undone. The booster seat is now ready to use.



8.2 Routing the diagonal and lap belts correctly

installation method: put isofix connector fix onto the car at first, then use 3-point seat belt fix baby and car seat.

8.2.1 Make sure there is no twist of car belt. Route the diagonal belt on the shoulder of your child and lap belt under the armrest of car seat on one side. Make sure lap belt and diagonal belt must go under armrest.



8.2.2 Check and make sure there is no twist of the belt. Insert the metal tongue of car belt into the car seat buckle until you hear a clear "click".




Warning! Make sure your child arms are above both diagonal and lap belt.



9 Removing the cover

9.1 Take off the backrest cover by raising the cover from down to up.



9.2 Remove the base cover by raising the cover from down to up.



10. Assembling the car seat

10.1 Take the seat out from the plastic bag and put it flatly on floor.

10.2 Connect the elastic string on both sides of the seat base cover onto the hook on backrest, and put the hook in the hole of seat base. Then make the backrest from flat to upright position until you hear a clear click.

10.3 Guide the two buckle latches together engage them into the harness buckle until you hear a clear "click".

10.4 Pull the harness adjust strap. (fig.14)



11. Cleaning the cover

This child car seat must be used with seat cover as seat cover is an integral part of child car seat. It plays an important role in ensuring that the system works properly. Make sure that only approved replacement cover by manufacturer could be used.

Daily cleaning and care instruction for cover

*Hand wash the cover in cold or warm water.

*Do not dehydrate. Suggest to use towel to absorb water and hang dry.

Note:

*Do not use detergent that contains chlorine bleach.

*Do not use washing machine, dehydration machine and dryer.



Hand wash



Do not bleach



Do not iron




Do not dehydrate



Rub gently



Hang dry

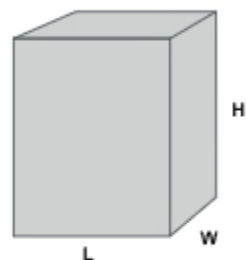12.Dimension Info

LENGTH	46 CM	CARTON LENGTH	52 CM
WIDTH	38.5 CM	CARTON WIDTH	41.5 CM
HEIGHT	68 CM	CARTON HEIGHT	67.5 CM
WEIGHT	3.2 KGS		