


Chelino

PLATINUM

ECE R129/03

Forward Facing Child Height 76cm-150cm / Child weight 36kg

Rearward Facing : Child Height 40 cm-105cm / Child weight 18kg

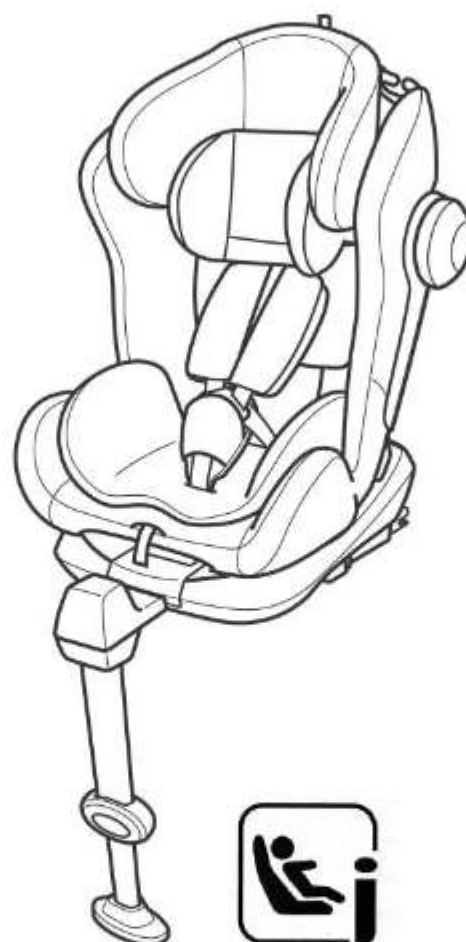

ATLANTIS STAGES II

CHELINOBABY GROUP OF COMPANIES
NO. 12 KIMBERLITE ROAD, THETA EXT 5, BOOYSENS RESERVE, JHB, 2091. SA.
Tel: +2711 8352520

www.chelinobaby.co.za



NOTICE

Notice regarding i-Size category Enhanced Child Restraint Systems (40-105cm)

This is an i-Size Enhanced Child Restraint System.

It is approved according to UN Regulation No. 129, for use in, i-Size compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle users' manual.

If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

Notice regarding specific vehicle booster seat category Enhanced Child Restraint Systems (100-150cm)

This is a specific vehicle booster seat Enhanced Child Restraint System.

It is approved according to UN Regulation No. 129, for use in the specific vehicle indicated in the applicable vehicle list.

If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

NOT TO USE REARWARD FACING ECRS IN SEATING POSITIONS WHERE THERE IS AN ACTIVE FRONTAL AIRBAG INSTALLED.

"IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 15 months (Refer to instructions)".

To use this enhanced child seat approved to the ECE R129/03 regulation, your child must meet the following requirements.
Forward Facing: Child height 76cm-150cm / Child weight \leq 36kg
Rearward Facing: Child height 40cm-105cm / Child weight \leq 18kg

Feature

This enhanced child seat can be adjusted 360° rotation.

According to UN Regulation No/129/03, this enhanced child seat is a Universal ISOFIX Child Restraint and should be fitted using the ISOFIX connections.

To use this enhanced child seat approved to the ECE R129/03 Regulation, your child must meet the following requirements.

Forward Facing: Child height 76cm-150cm / Child weight ≤ 36kg

Rearward Facing: Child height 40cm-105cm / Child weight ≤ 18kg

WARNING

- In order to properly protect your child, please take the time to read the instruction manual and install the enhanced child seat and use it exactly as described in the instruction manual at all times.

- This instruction manual must be retained in hand in the instruction manual storage compartment at tie back of the seat body for its life period at all times.

- To use this child seat with the ISOFIX connections according to the ECE R129/03 Regulation, your child must meet the following requirements.

Forward Facing: Child height 76cm-150cm / Child weight ≤ 36kg

Rearward Facing: Child height 40cm-105cm / Child weight ≤ 18kg

"IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 15 months (Refer to instructions)".

Keep your child rearward facing as long as possible as rearward facing is the safest position.

WARNING : DO NOT use rearward facing child seat in seating positions where an active frontal airbag installed . Death or serious injury can occur.

- Do not use this enhanced child seat in the home. It has not been designed for home use and should only be used in your car.

- Do not leave your child unattended in the enhanced child seat at any time.

- The rigid items and plastic parts of an ECRS must be so located and

installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.

- Any straps holding the restraint to the vehicle should be tight, that any support-leg should be in contact with the vehicle floor, that any straps or impact shields restraining the child should be adjusted to the child's body, and that straps should not be twisted.
- Ensuring that any lap strap is worn low down, and that any impact shield installed properly, so that the pelvis is firmly engaged, shall be stressed
- The device should be replaced when it has been subject to violent stresses in an accident
- It is dangerous that making any alterations or additions to the device without the approval of the Type Approval Authority, and not following closely the installation instructions provided by the child restraint manufacturer
- The chair should be kept away from sunlight, otherwise it may be too hot for the child's skin.
- Any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.
- The ECRS must not be used without the cover. the ECRS cover should not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.
- Not to use any load bearing contact points other than those described in the instructions and marked in the ECRS.
- Please referred to the vehicle manufacturer's handbook before installing this i-size ECRS.



Installation position



1 When using as i-Size

This ECRS system is suitable for vehicles equipped with the ECE R14 requirements. And only after installed ISOFIX, then can use on it.

2 When using as Specific Vehicle Booster seat

This ECRS system is suitable for seat belt that has passed the ECE R16 requirement and is not suitable for models only equipped with 2-point seat belts. And only after installed ISOFIX, then can use on it.



The suitable location for installation on the car is shown on the left:



⊘ Not allowed to install child car seat.


✓ Safe to install child car seat.

A Only with 3-point seat belt and ISOFIX attachments can install in this place.


B When front the of the seat with opened airbag, cannot install in this place.



Parts List

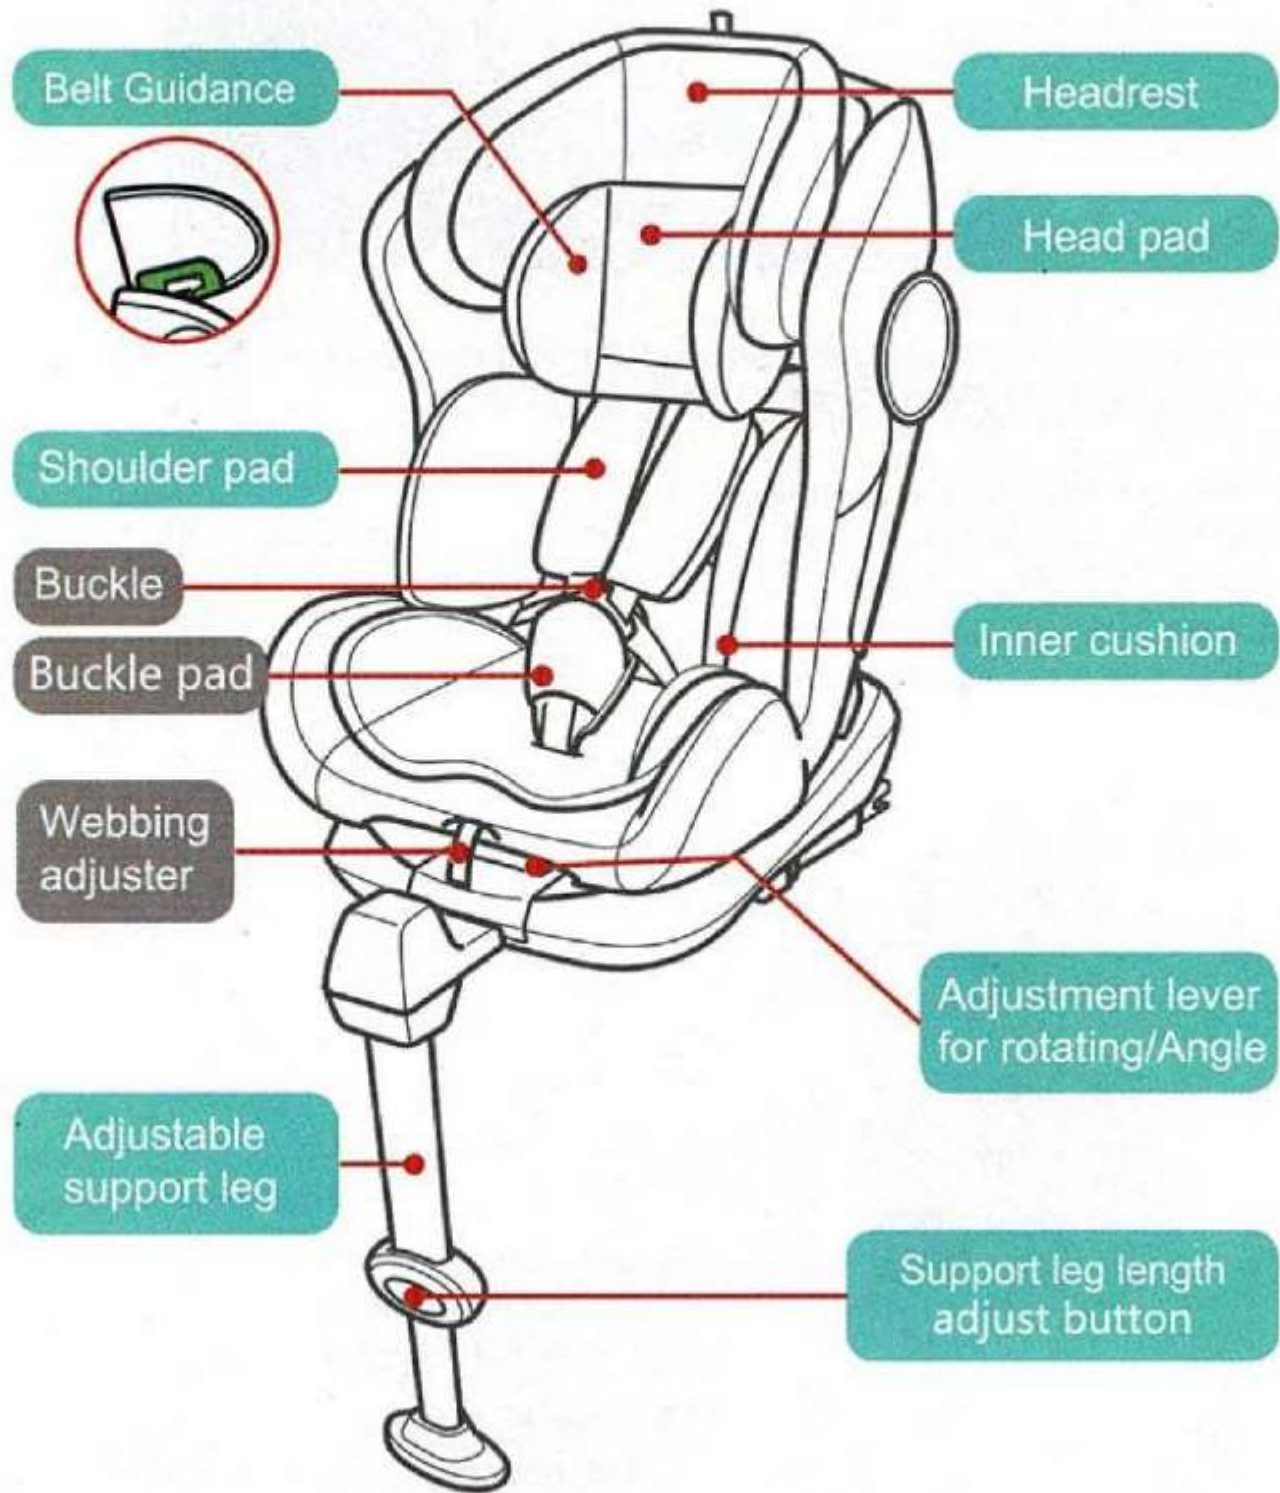

Noice: Inner cushion is suitable for child height of 40-60cm.


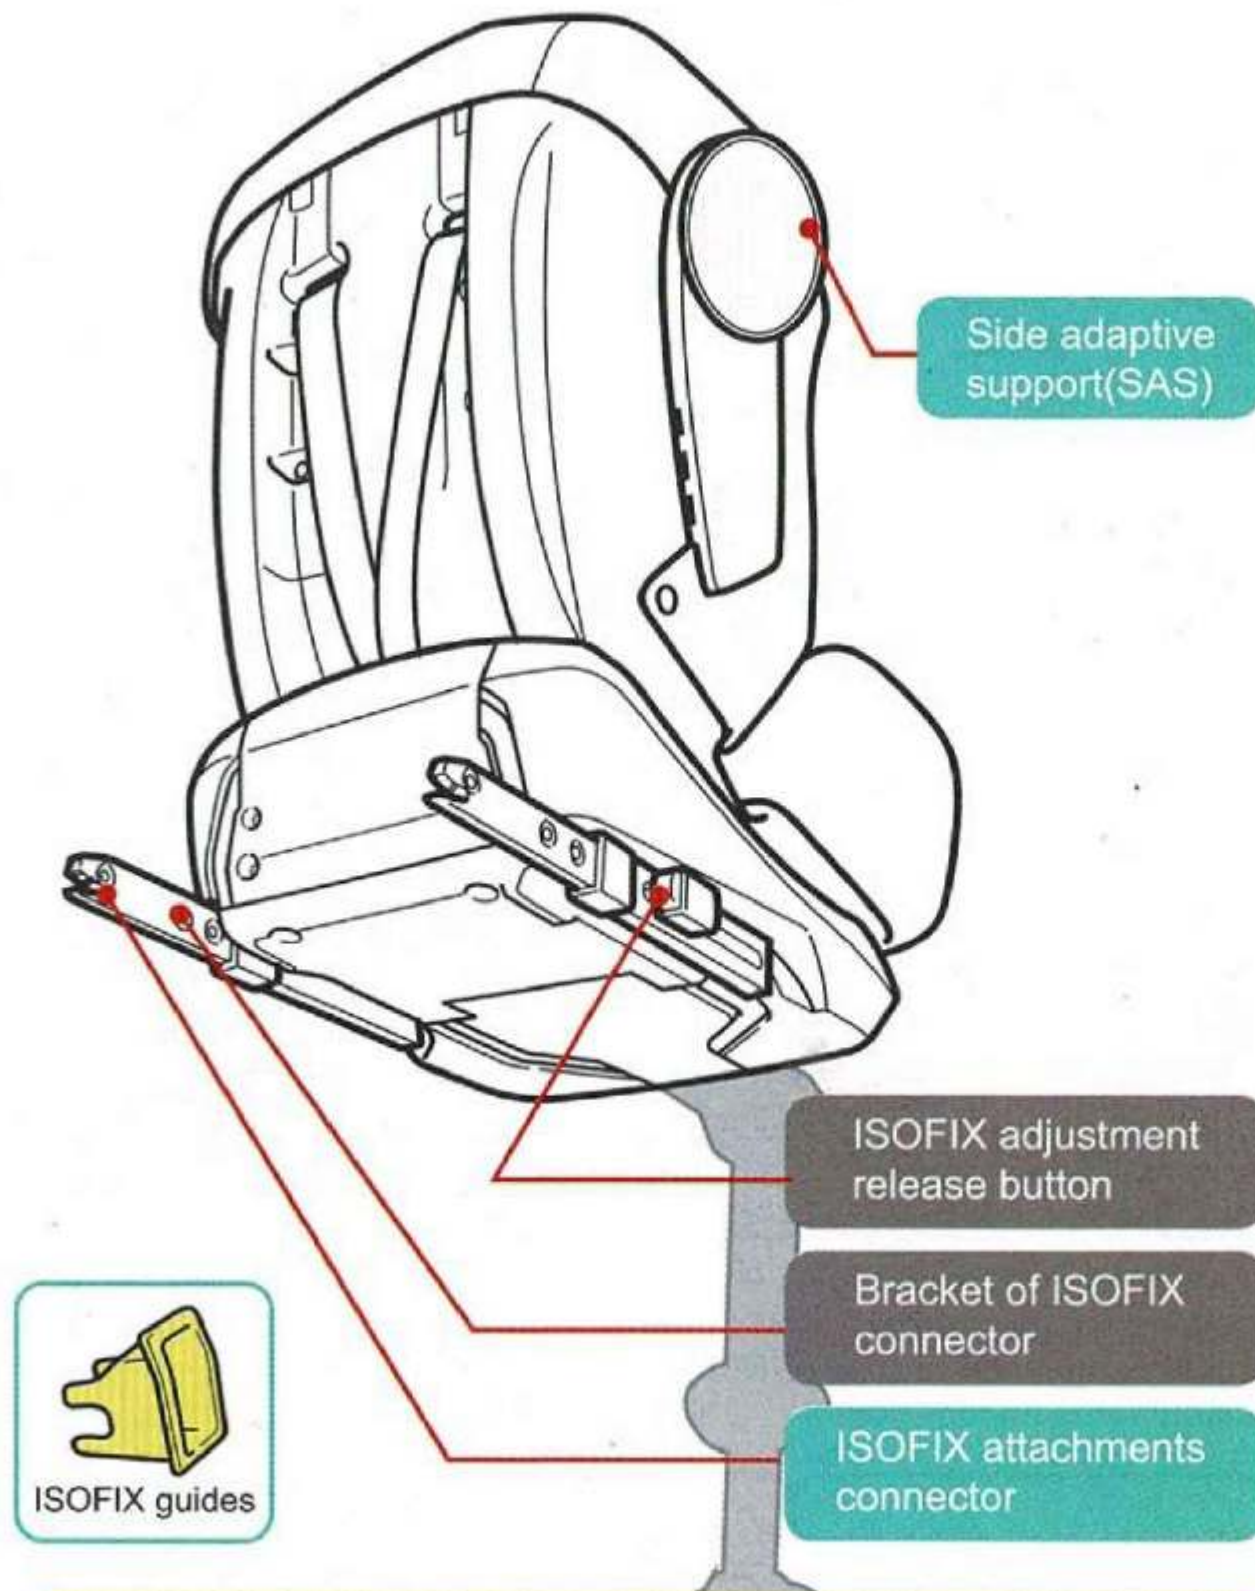


Take care of all spare part, any lost make sure to contact with manufacturer, The parts lack of damaged baby car seats are not allowed to use.


Secure the safety seat to the car seat (use ISOFIX)




Fit the ISOFIX attachments guides with the ISOFIX attachments anchor points.

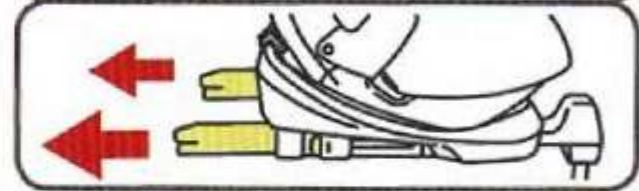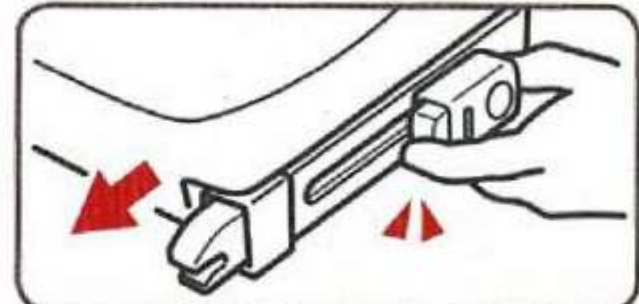

Extend the ISOFIX attachments connectors by depressing on the release button. Adjust the right length of the ISOFIX connector.

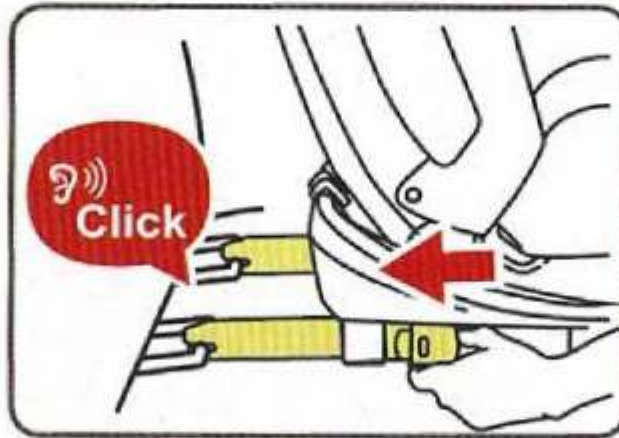

Make sure that both ISOFIX attachments connectors are securely attached to their ISOFIX attachments anchor points.

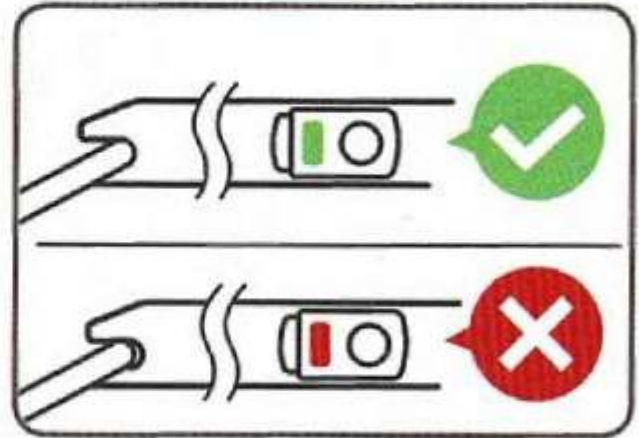


The colors of the indicators on both ISOFIX attachments connectors should be completely green.



Push backrest of baby car seat to car seat tightly, make the length of ISOFIX to the shortest, then check by moving child seat back and forth if the baby car seat is fastness.




Press and hold the adjustment button of the support leg.

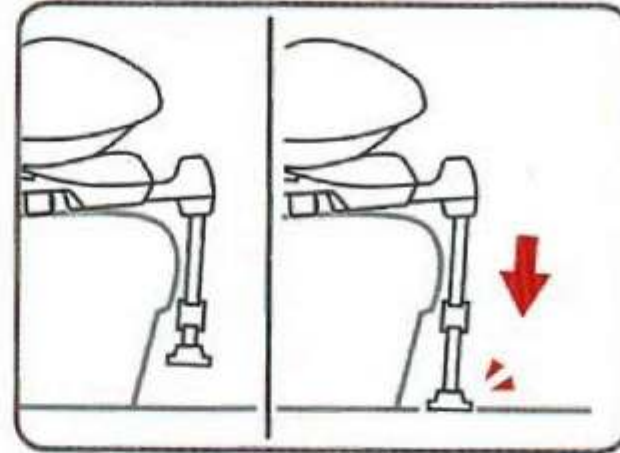


Extend support leg naturally to the length that can reach the ground, release the adjustment button.



Check if the bottom of the safety seat fits the car seat to ensure there are no gaps.

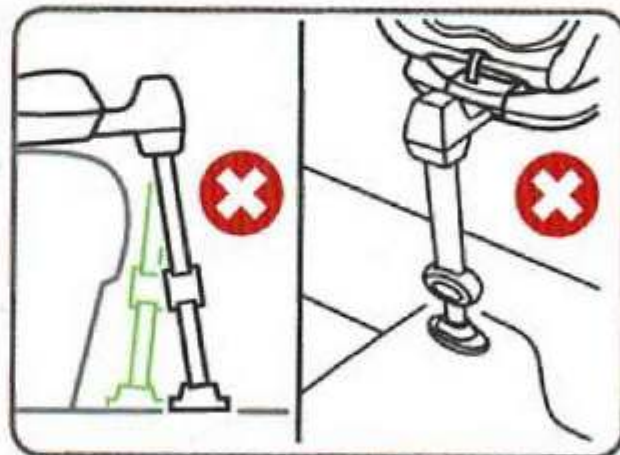

Support leg angle should not exceed 90°, can not support on the raised ground.

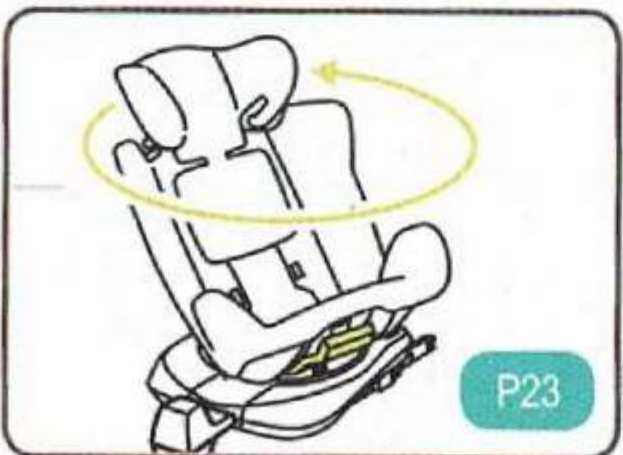

Rotate safety seat:
 Rearward Facing: Child height 40cm-105cm / Child weigh \leq 18kg
 Forward Facing: Child height 76cm-105cm / Child weight \leq 18kg

P23

Use ISOFIX+support leg




- ① Secure the safety seat to the car seat.
- ② Rotate safety seat to the opposite direction of travel.
- ③ Fix the child occupant to the safety seat;

Rearward Facing:

Child height 40cm-105cm

Child weight ≤ 18 kg

Use ISOFIX + support leg

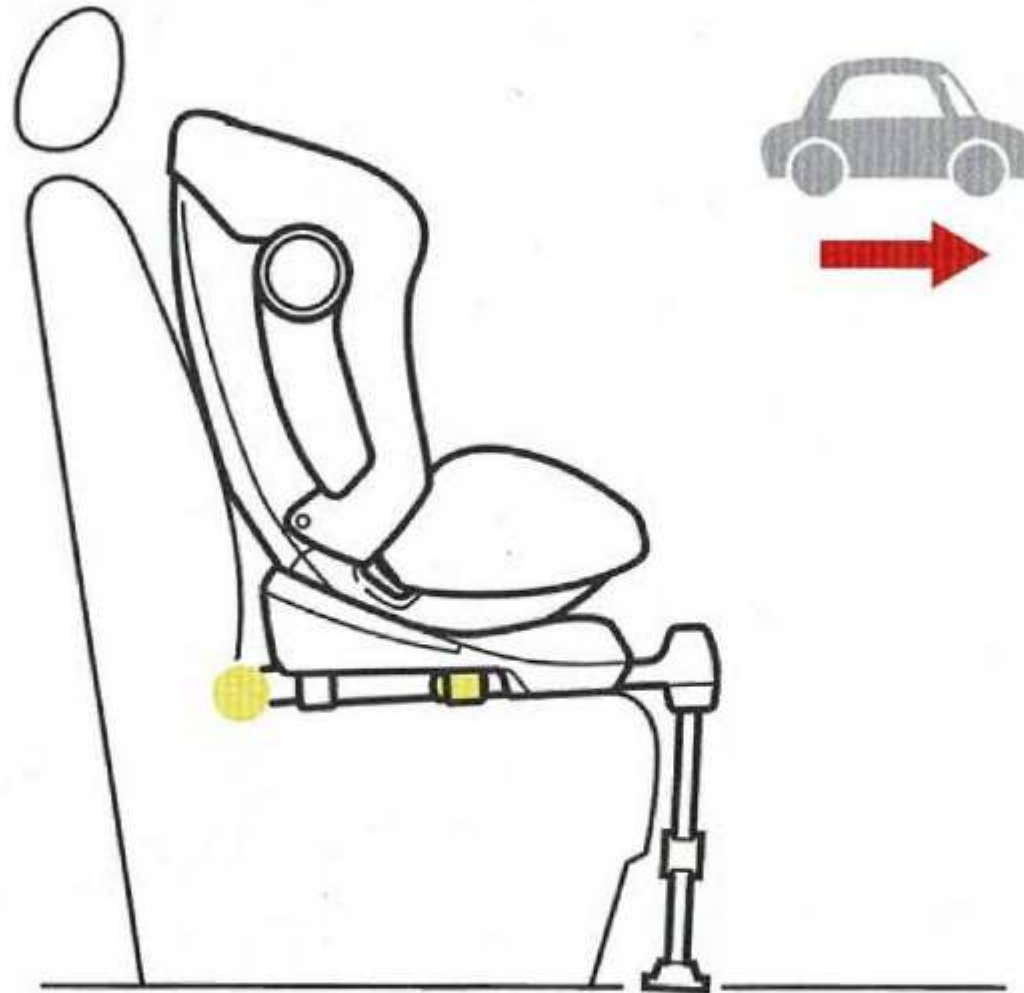


- ① Secure the safety seat to the car seat.
- ② Rotate safety seat to the direction of travel
- ③ Fix the child occupant to the safety seat;

Forward Facing:

Child height 76cm-105cm

Child weight ≤ 18 kg


Using 5 point harness to fix child

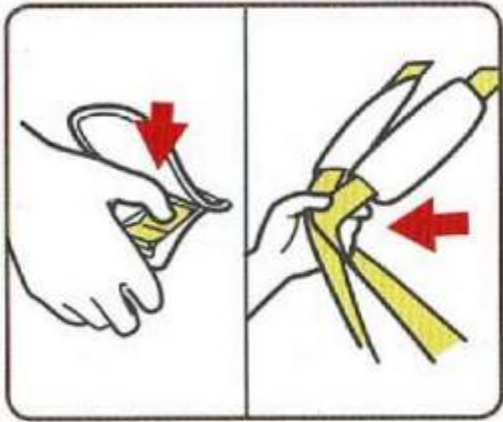


While pressing the harness adjustment button, pull completely the two shoulder harnesses of the child restraint.



Place the child in the child restraint and pass both arms through the harnesses.

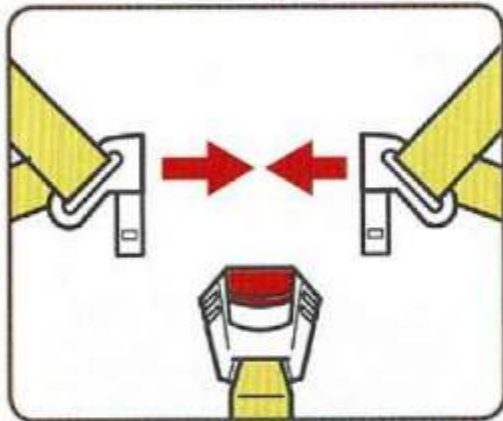

Important: The left and right bolts of the 5-point safety seat buckle are combined first.

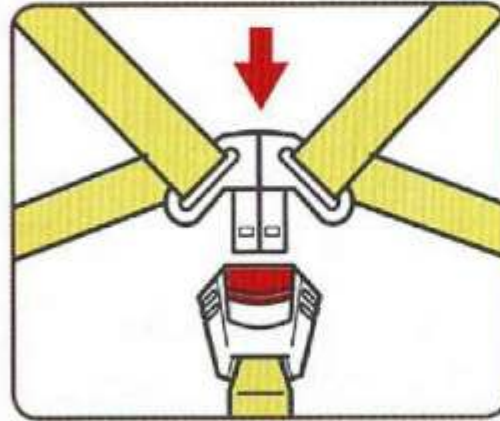


Engage the buckle as pictures show.




One side of 5-point safety seat buckle was locked is not allowed.




Make sure the buckle is properly engaged.

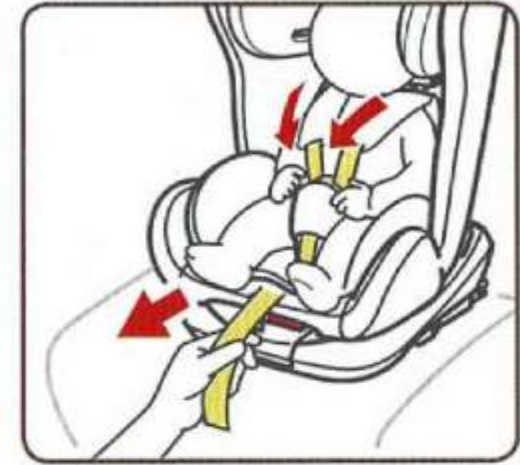

Pull the retractor belt to the right tightness.

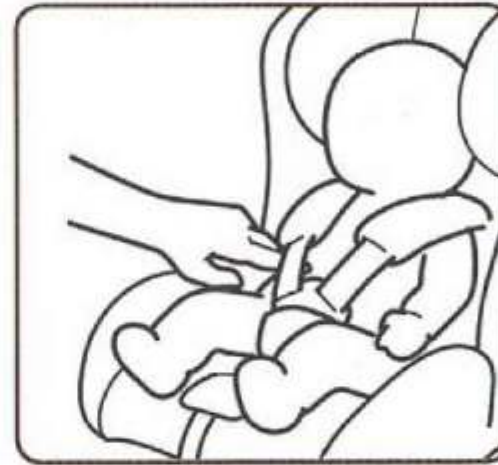

Make sure the space between the child and the shoulder harness is about the thickness of two fingers.

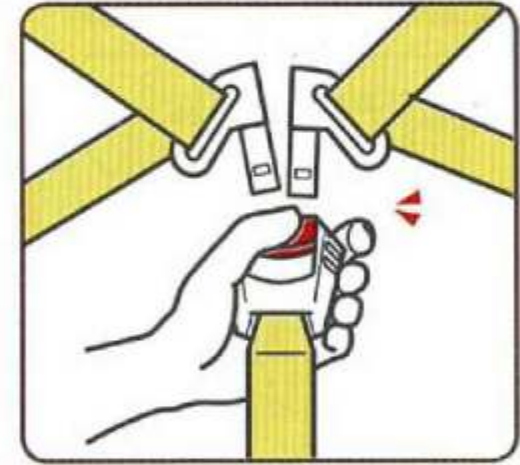

Press the red button to disengage the buckle.

The style of the buckle may vary, depending on the actual receipt.



Warning:
Over-relaxed seat belts are not conducive to protecting children's safety.

Installation with ISOFIX attachments+adult safety-belt

Forward Facing:

Child height 100cm-150cm

Specific Vehicle Booster seat




Rotate the seat to forward direction. Recline level adjust to level 1.




Install the ISOFIX interface then pull the car seat belt out.



Shoulder belt must pass through shoulder belt guide. Waist belt must pass through lap belt guidings.

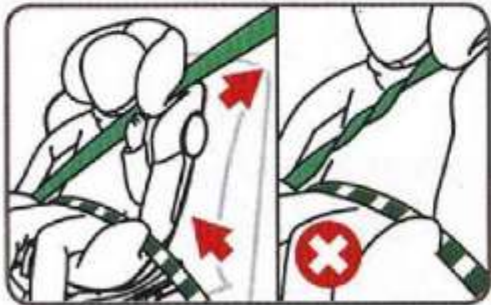

When installing and adjusting the safety belts, make sure that both the shoulder belt and waist belt are not twisted and will not keep the safety belts from being properly positioned. Note the correct belt position should be above the child's pelvis.

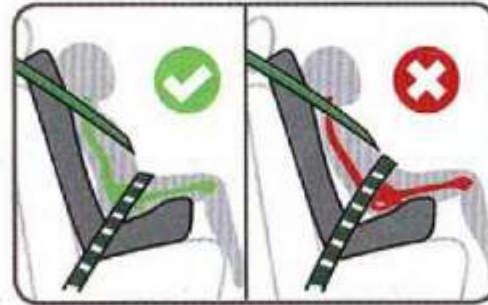


Release ISOFIX



Prop up baby car seat with your knees.




2. Pressing on release button and pull back to release the ISOFIX connector.

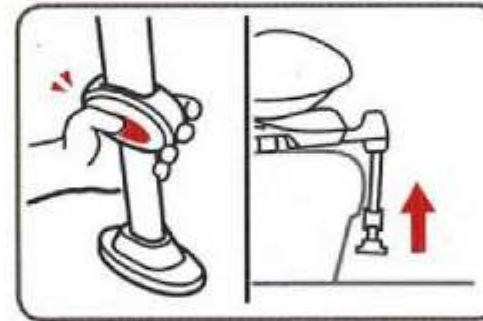

Shorten the support leg by pressing the support leg button.



Move the safety seat away from the car, fold the support leg.

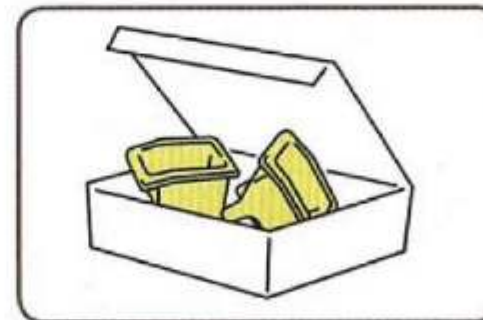


Keep ISOFIX attachments guides, please store it properly

⚠ Warning


NEVER install the product with car belt only. Pls check the blue part in this page if you are failure to unblock the ISOFIX.

**Not brutal demolition
Avoid damage to parts**

▷ Recline adjustment

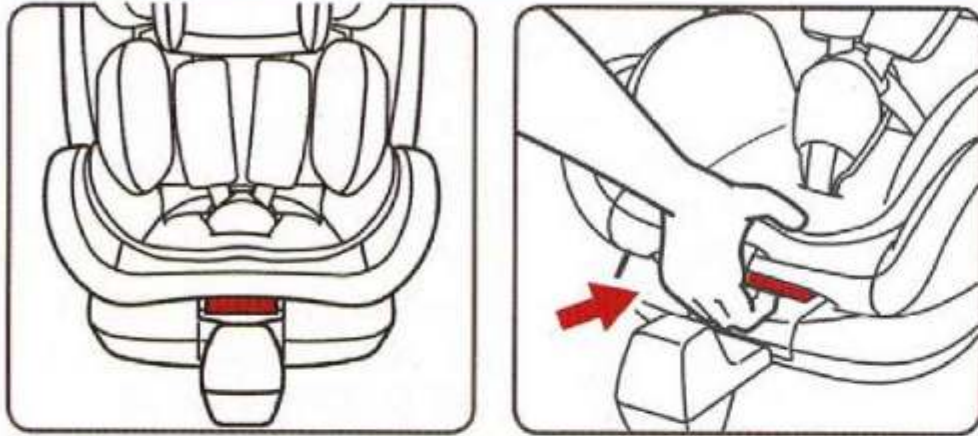

Find the red hand lever, pull it up to adjust the position.

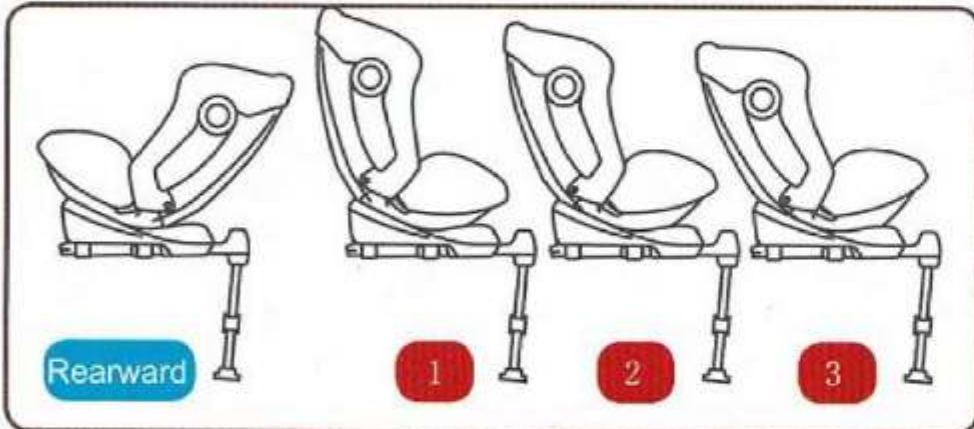


Forward Facing: Child height 76cm-150cm / Child weight ≤ 36kg
Rearward Facing: Child height 40cm-105cm / Child weight ≤ 18kg

This safety seat have 3 positions for forward installation. Forward Facing: Child height 76cm-105cm could use position 1, position 2 and position 3. Forward Facing-Child height 100cm-150cm only could use position 1. The safety seat only provide one position for rearward installation.

⚠ IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 15 months (Refer to instructions)


Rotate/changing direction

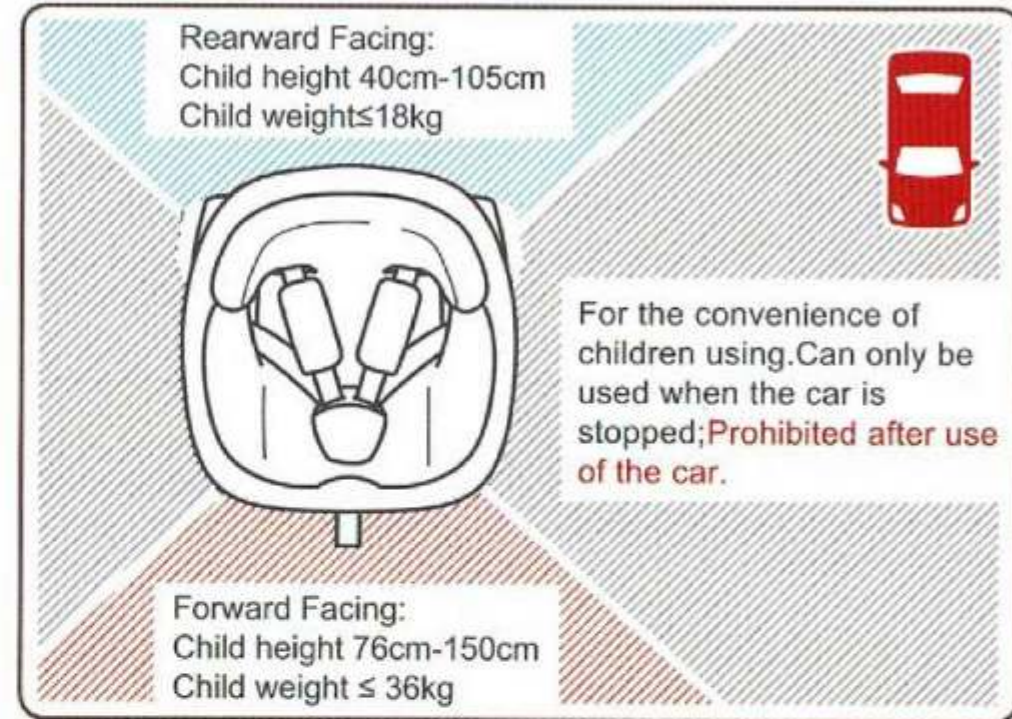


This child seat could be rotated by 360° based on seatbase and can be locked in four directions.



Pull adjustment lever to biggest angle, then rotate backrest.

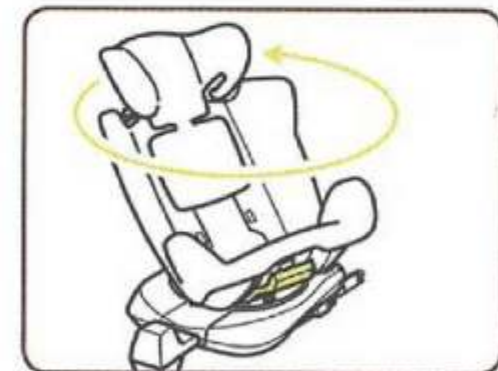

Keep pulling adjustment lever when rotate backrest.

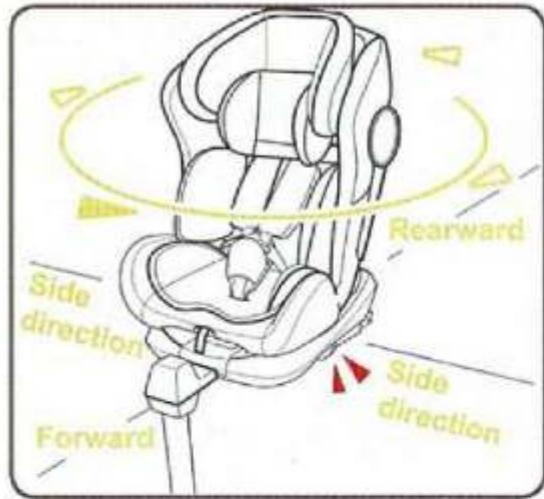

Release adjustment lever then rotate backrest, "click" sound shows safety seat is locked in four direction.




Confirm safety seat is fixed tightly by shaking or rotating seat.



Prohibit the use of safety seats that are not locked in direction, please check carefully before using.


▷ 5 point harness adjustment

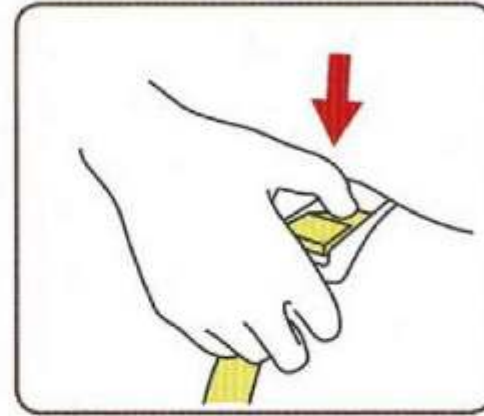


Pass the harness adjustment button



Adjusting the harness according to the current situation of child, make sure there no any twisting.




While pressing the harness adjustment button ,pull completely the two shoulder harnesses of child restraint.

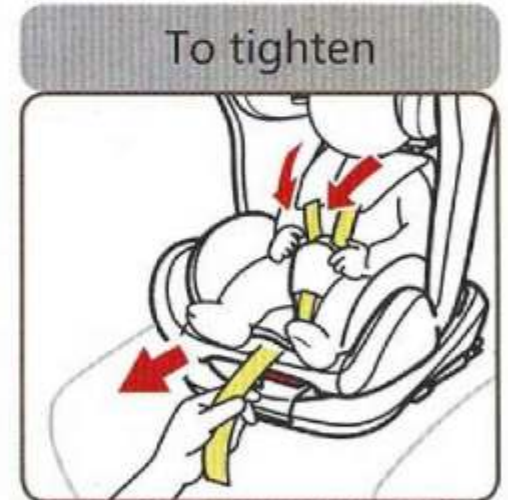


Pull down the adjustment webbing and adjust it to the proper length to make sure your child is snugly secured.

Head rest adjustment

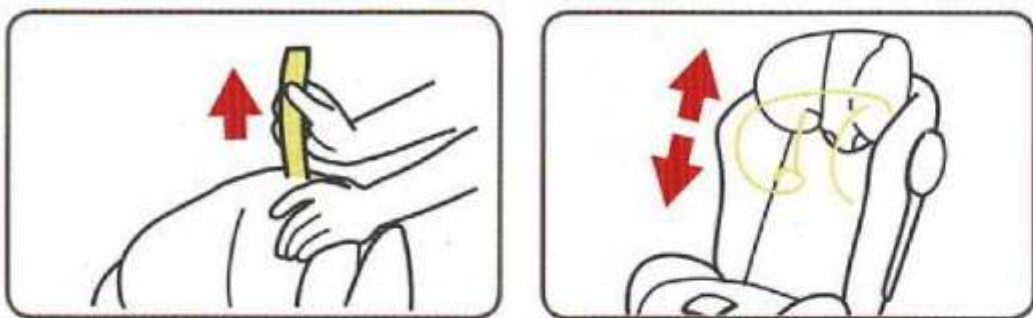

Pull the head support adjustment, meanwhile pull up or push down the head support.

Checking the shoulder strap height

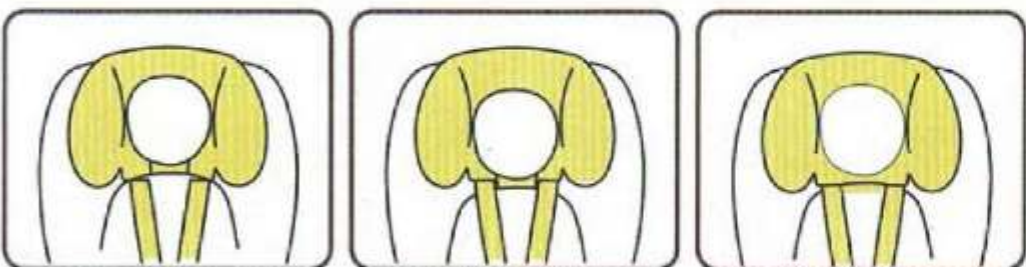

No-Too low


No-Too high

Yes-Correct


Make sure that the harness is on the same height as your child's shoulders. Otherwise, move the shoulder strap up or down to the correct slot.

Remove inner cushion and head pad


while children height is more than 60cm , remove all inner cushions.

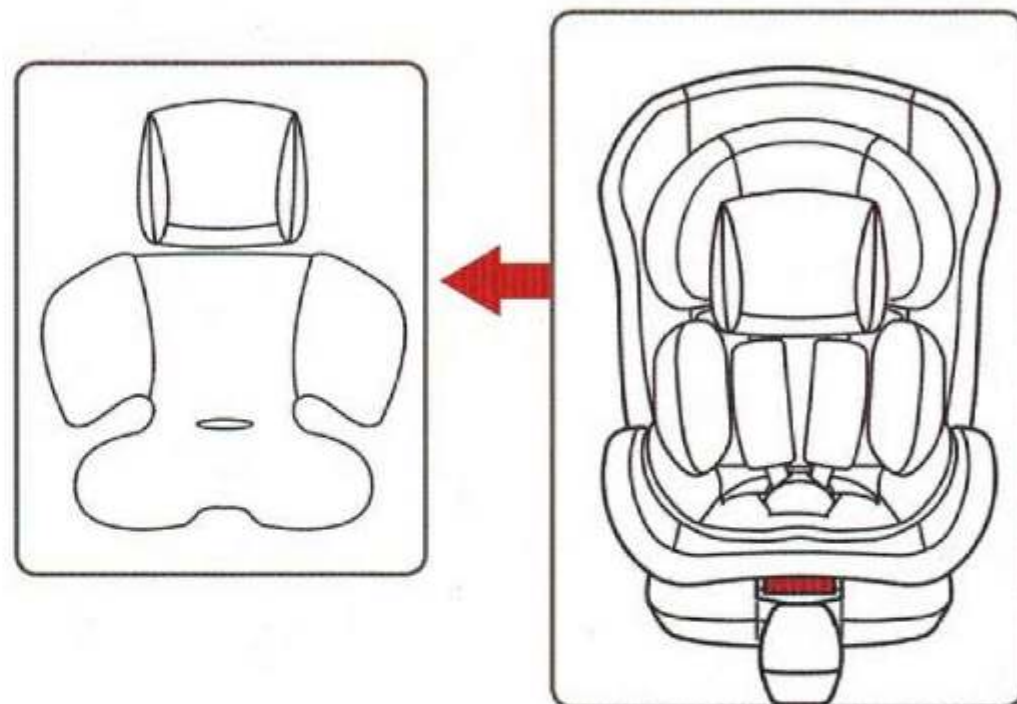


Conceal the harness system(Suitable for child height 100cm-150cm)

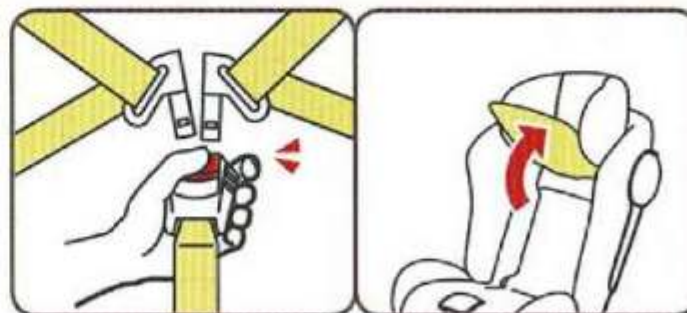


Release the 5-point buckle, pull up the headrest, turn up the back cushion.

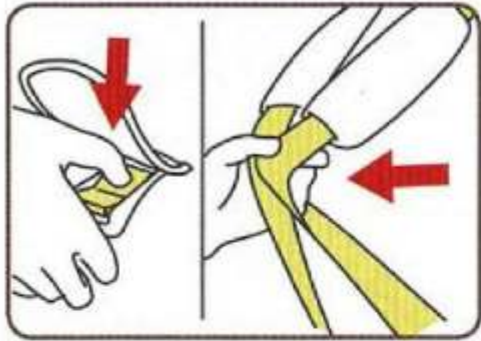


Press the harness adjustment button and loosen the straps.

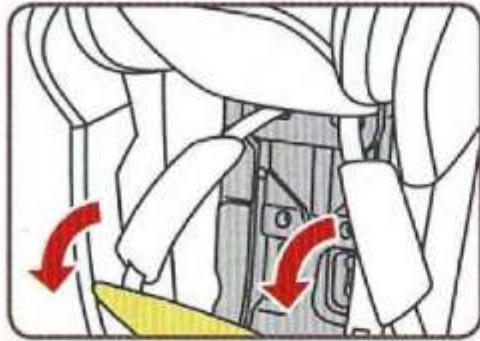


Lift the upper flap upward and pull the lower flap forward.

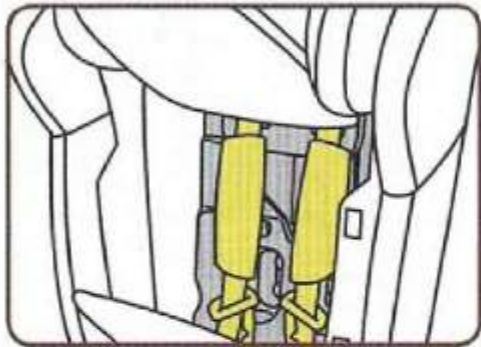

Store the shoulder harnesses and buckle in their storage compartments.

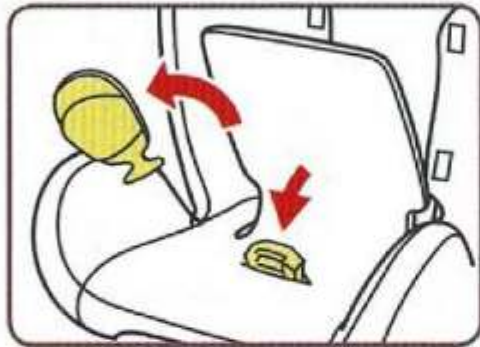

Detach the snaps.

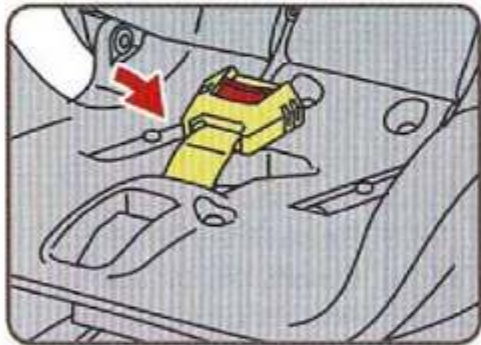

Pull the buckle to the back of the seat pad, and then store buckle and buckle tongues in respective storage compartments.



Properly tighten the seat belt to avoid being too tight and affecting normal use.

Detach soft goods



press the red button to disengage the buckle.




Raise the back cushion under the headrest.




1. Pull up to take the shoulder pad out from the hole.



2. Pull down to take the left shoulder pad out.

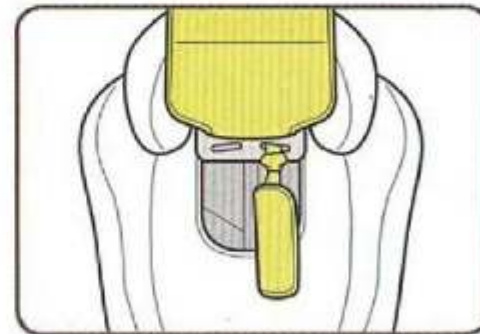


Repeat step 1.2, take the right shoulder pad out.

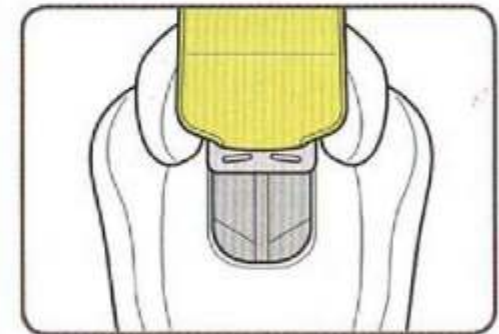




Remove the buckle pad, conceal the buckle in the buckle hole on the seat base.

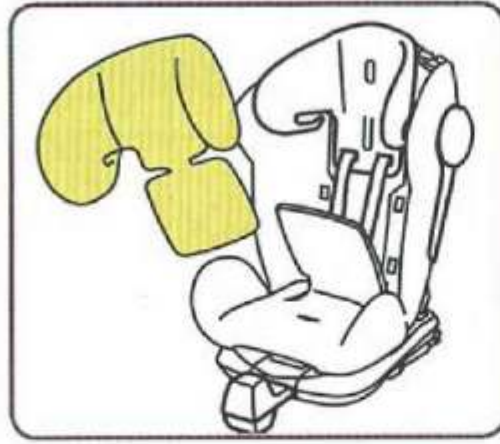

Remove the headrest cloth cover.

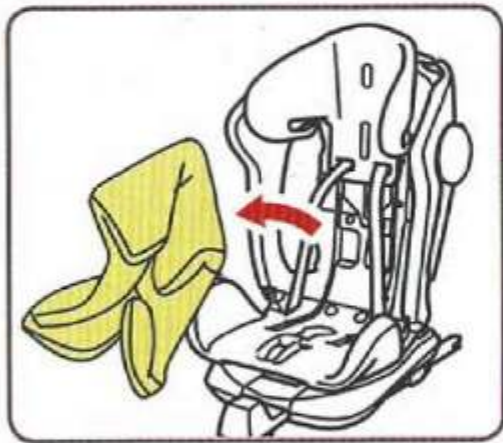

Remove the cloth cover all seats.

Seat cloth cover mounted:

To assemble soft goods, reverse the steps above.

Warning

Child restraint system (safety seat) without cloth cover cannot be used.

The store of baby car seat.

Safety seat maintenance

After removing foam of infant insert, please store it somewhere that the child can not access it.

- Please wash the soft goods with cold water under 30°C.
- Do not iron the soft goods.
- Do not bleach or dry clean the soft goods.
- Do not use undiluted neutral detergent, gasoline or other organic solvent to wash the child restraint. It may cause damage to child restraint.
- Do not twist the goods to dry with great force, it may leave the soft goods with wrinkles.
- Please hang dry the soft goods in the shade.



Warning

Child restraint system (safety seat) without cloth cover cannot be used.

Safety seats save.


- Please always check the seat parts are complete, the seat is in good condition to reduce the chance of accidents.
- Please remove the child restraint from the vehicle seat if not in use for a long period time. Put the child restraint in the shade and somewhere your child can not access it.
- Please do not leave the seat in a cold or hot, humid environment for long periods of time.
- Please keep this instruction well for checking.

Post-accident treatment

In the event of a violent collision and accident, please replace it with a new seat. If you have any other questions, please contact the distributor or manufacturer.

Due to variation on the styles and designs of our products, the photographs and illustrations shown in this manual are generic. Therefore products fabric, colour and design may vary from images shown, Chelino reserves the right to alter products specifications.

Dimension Info

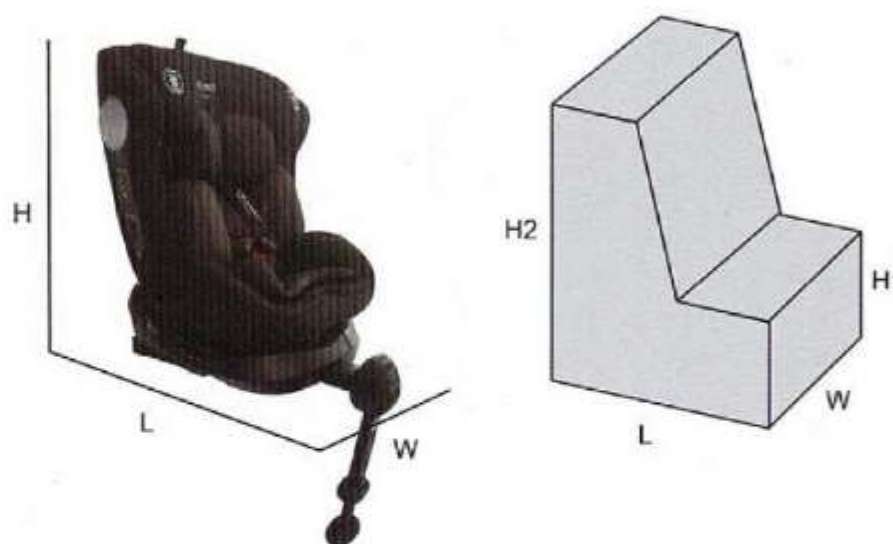

LENGTH	43 CM	CARTON LENGTH	59.5 CM
WIDTH	45 CM	CARTON WIDTH	45.5 CM
HEIGHT	138 CM	CARTON HEIGHT1	30 CM
		CARTON HEIGHT2	70.5 CM
WEIGHT	14.6 KGS		

ChelinoBaby®

Stores: ChelinoBaby – Ormonde – JHB
ChelinoBaby – Fourways – JHB
ChelinoBaby – Woodmead Square – JHB
ChelinoBaby – Greenstone – JHB
ChelinoBaby – Menlyn – Pretoria
ChelinoBaby – Kolonnade – Pretoria
ChelinoBaby – Centurion – Pretoria
ChelinoBaby – Gateway – Durban
ChelinoBaby – Online – www.chelinobaby.co.za



Imported for :
ChelinoBaby Group of Companies.
No. 12 Kimberlite Road , Theta Ext 5 ,
Booyens Reserve , JHB , 2091. SA.
Tel: +2711 8352520
Info: info@chelinoplatinum.co.za