


# ChelinoBaby®

Stores: ChelinoBaby – Ormonde – JHB  
ChelinoBaby – Fourways – JHB  
ChelinoBaby – Woodmead Square – JHB  
ChelinoBaby – Greenstone – JHB  
ChelinoBaby – Menlyn – Pretoria  
ChelinoBaby – Kolonnade – Pretoria  
ChelinoBaby – Centurion – Pretoria  
ChelinoBaby – Gateway – Durban  
ChelinoBaby – Online – [www.chelinobaby.co.za](http://www.chelinobaby.co.za)



Imported for :  
ChelinoBaby Group of Companies,  
No. 12 Kimberlite Road , Theta Ext 5 ,  
Booysens Reserve , JHB , 2091. SA.  
Tel: +2711 8352520  
Info: [info@chelino.co.za](mailto:info@chelino.co.za)

# Chelino

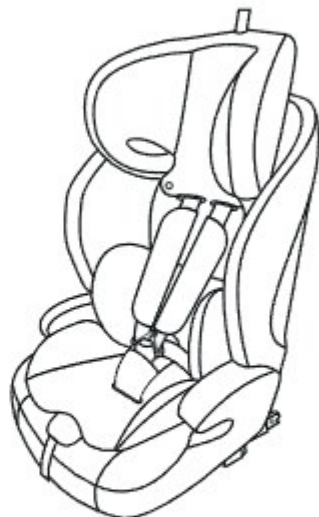

## INDY USER MANUAL

Group: I, II, III  
Weight: 9-36kg  
Age: 9 months-12 years old

**Notice regarding Universal category ( Installation of Group I,II,III Use Car Belt )**

1. This is a "Universal" child restraint. It is approved to Regulation No. 44, 04 series of amendments, for general use in vehicles and it will fit most, but not all, car seats.
2. A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group.
3. This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs which do not carry this notice.
4. If in doubt, consult either the child restraint manufacturer or the retailer.

**Notice regarding Semi-universal category (Group I, II, III Installation with ISOFITand car belt)**

This child restraint is classified for "(Restricted/Semi-universal)" use and is suitable for fixing into the seat positions of the following cars:

CAR	FRONT		REAR	
Refer to vehicle list	Outer	Centre	Outer	Centre
	No	No	Yes	No

Seat positions in other cars may also be suitable to accept this child restraint. If in doubt, consult either the child restraint manufacturer or the retailer. Only suitable if the approved vehicles are fitted with 3 point with retractor safety-belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

**NOT TO USE REARWARD FACING SYSTEMS IN SEATING POSITIONS WHERE THERE IS AN AIRBAG INSTALLED.**

Due to variation on the styles and designs of our products, the photographs and illustrations shown in this manual are generic. Therefore products fabric, colour and design may vary from images shown, Chelino reserves the right to alter products specifications.

Important notice before using. ....	01
The constitute of Baby Car Seat. ....	03
Installation position. ....	05
Option of installation method. ....	.06
How to install ISOFIT ....	.07
Unlock the ISOFIT connector ....	.08
Group I Installatoin method. ....	.09
Group II Installation with ISOFIT and car belt. ...	.12
Release the 5-point buckle,change to Group II. ...	.13
Removing and installing seat back ....	.14
Group III Installation with ISOFIT and car belt ...	.15
Installation of Group II (Use Car Belt) ....	.16
Installation of Group III (Use Car Belt) ....	.17
Remove/install the cover. ....	.18
Maintaining/washing of baby car seat. ....	.19
The store of baby car seat. ....	.20



## Important notice before using

### Warning!

To ensure maximum security for your child, please read the following instruction carefully.

- (1). Please read the entire instruction manual thoroughly before using the child car seat. Improper installation can endanger the life of your child.
- (2). Under no circumstances should the seat be installed on a passenger seat equipped with an airbag. This can be very dangerous.
- (3). It is most important that the seat belt is correctly routed.
- (4). Never make unauthorized alterations or additions to the product.
- (5). Never use the child car seat if it has been in an accident, or if it has become badly worn.
- (6). Do not leave your children in the seat unattended at any time.
- (7). Child car seat parts may become hot in direct sunlight. Cover with a sheet to prevent this.
- (8). Make sure that your child never plays with the buckle as the buckle is not fully tamperproof.
- (9). Ensure that all other passengers, luggage and loose objects are properly secured.
- (10). Never use the child car seat without cover. Only covers approved by manufacturer can be used.
- (11). The child car seat must be secured with the car seat belt when not in use.
- (12). In an emergency your child can be released quickly by pressing the red button on the seat belt buckle.
- (13). Store this child car seat in a safe place when it is not being used. Avoid placing heavy objects on it.
- (14). Most accidents occur on short trips, so do not be tempted to avoid using the seat simply because you are not travelling very far.
- (15). Make sure to keep plastic bag long distance from your child as it is likely to cause suffocation.
- (16). Do not expose the child car seat to any corrosive substance. Use wet towel to clean the plastic body instead of any solvent when the plastic body is dirty.
- (17). Make sure the child car seat belt is adjusted to suitable position and the belt can't be twisted.
- (18). It's very important to put any lap belt low down so that the pelvis is firmly stressed.
- (19). Do not use this product second hand as you never know its history.
- (20). The rigid items and plastic parts of a child restraint must be so located and installed that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door of the vehicle.
- (21). If position of the adult safety-belt buckle relative to the main load bearing contact points on the child safety seat is unsatisfactory. Please contact the manufacturer if in doubt about this point.
- (22). Not to use any load bearing contact points other than those described in the instructions and marked in the child restraint.
- (23). Before use this seat, Please assemble the car seat according to the detailed describe in page 14.

## Parts List

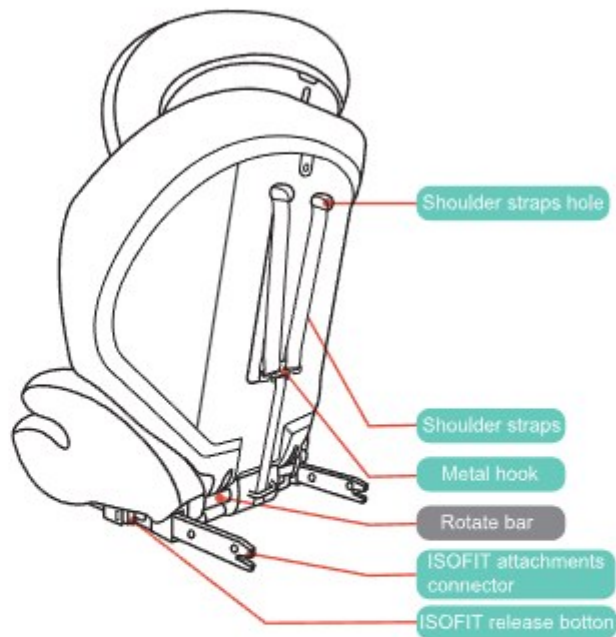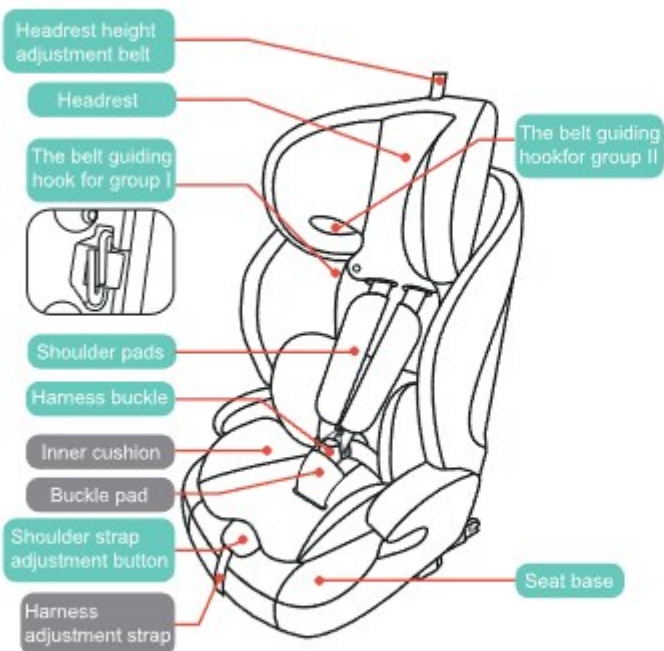

Take care of all spare part, any lost make sure to contact with manufacturer, The parts lack of damaged baby car seats are not allowed to use.




Do not install this child restraint under the following conditions:


1. Vehicle seats with 2-point safety belts.
2. Vehicle seats facing sideward or rearward with respect to the running direction of the vehicle.
3. Vehicle seats unstable during installation.


The applicable car model must be equipped with the safety belt of the 3-point belt retainer required by GB14166 or ECE R16.



The suitable location for installation on the car is shown on the left:

 Do not place the child restraint in this vehicle seat where an active frontal airbag is installed if your child is still in rear facing mode.

 Best seat to place child restraint.

 Do not place the child restraint in the vehicle seat with 2-point safety belts.



Group I,II,III Installation with ISOFIX and car belt; Group I, II ,III installation with car belt.

This baby car seat has 3 mass group based on (GB27887-2011) and (ECE R44/04), Please choose the way to install the mass group corresponding to the children's immediate weight .



**I**

**9-18** kg

9 months to 4 years old



P9



P7, P9



**II**

**15-25** kg

3 to 6 years old



P16



P7, P12



**III**

**22-36** kg

6 to 12 years old



P7, P15




P17

## How to install ISOFIT



Fit the ISOFIT attachment guides with the ISOFIT attachment anchor points.



Extend the ISOFIT attachment connectors by depressing on the release button. Adjust the right length of the ISOFIT connector.



Make sure that both ISOFIT attachment connectors are securely attached to their ISOFIT attachment anchor points.



The colors of the indicators on both ISOFIT attachment connectors should be completely green.



Push backrest of baby car seat to car seat tightly, make the length of ISOFIT to the shortest, then check by moving child seat back and forth if the baby car seat is fastness.

## Release ISOFIT



Push up baby car seat with your knees.



Pressing on release button and pull back to release the ISOFIT connector.



Keep ISOFIT attachments guides, please store it properly.

### **Warning**

NEVER install the product with car belt only. Please check the blue part in this page if you are failure to unblock the ISOFIT.

**Not brutal demolition**  
Avoid damage to parts

## Group I Installation method

Group I

Suitable for  
children weighing

**9-18** kg

(9 months to 4 years old)




Put the seat to forward facing direction, pull out the seat belt entirely (can install together with ISOFIT)




Press the harness adjustment button and loosen the straps.




Press the red button to disengage the buckle.




Pull up the headrest and raise the headrest lower back cushion, then remove the inner cushion



Shoulder strap must pass through shoulder strap guide, and route lap belt under armrest on seat base.



Return the headrest lower back cushion, when baby reach 18 months, remove all the inner cushion.



Insert the metal tongue of car seat buckle into the car seat buckle until you hear a clear "click". Hold down the child seat by one hand, pull the belt tightly by another hand.



Place the child in the child restraint and pass both arms through the harnesses..



**Important:** The left and right bolts of the 5-point safety seat buckle are combined first.




Engage the buckle as picture shown.


## Headrest Adjustment



Pull down the adjustment webbing and adjust it to the proper length to make sure your child is snugly secured.



Pull the head support adjustment, meanwhile pull up or push down the head support.



Headrest has 9 adjustable position.

Age of children	Position
Group 1: 9 months	2
Group 1: 3 years old	6
Group 2: 3 years old	3
Group 2: 6 years old	5
10 years old	Seat base

For several important age groups, please adjust the headrest position by the table above.



YES

Too high


Too low

Note: the shoulder strap should be as same level as possible with the child's shoulder, not too high or too low.

## Group II Installation with ISOFIT and car belt.

Group II

Suitable for  
children weighing  
**15-25 kg**  
(3 to 6 years old)



Install the ISOFIT interface then pull the car seat belt out.



Place the child in the seat, adjust the headrest in the suitable height.



shoulder strap must pass through shoulder strap guide, and route lap belt under armrest on seat base, make sure that the car seat belt doesn't hurt child's neck.



Insert the metal tongue of car seat into the car seat buckle until you hear a clear "click".




Tighten the seatbelt, check and make sure there is no twist of the belt.




## Release the 5-point buckle, change to Group II




Release the 5-point buckle, change to Group II

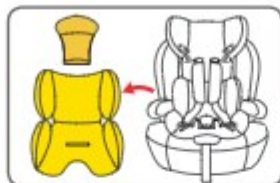


Remove the buckle pad and inner cushion.

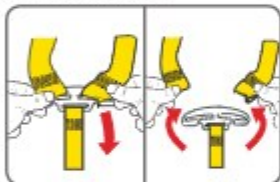

Release the shoulder strap, undo the shoulder straps out from the metal hook.

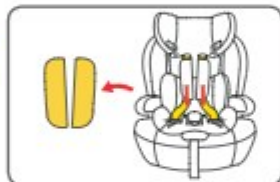

Pull the shoulder strap out of the shoulder strap hole, and then remove the shoulder protector from the shoulder strap.

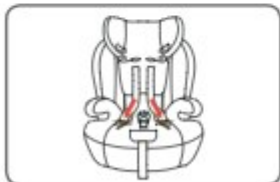

Take the left and right shoulder belts out of the buckle bolts.



Slide the metal plate which is used to fasten the harness buckle to the seat shell down on its edge through the strap slot, remove the shoulder strap from the seat and keep it well.




Insert the removed left and right buckle bolts into the buckle, and keep it in the buckle pad to avoid loss.




Note: Please store the removed buckle, buckle pad, left and right shoulder protector, shoulder strap and other parts properly.

## Removing and installing seat back.

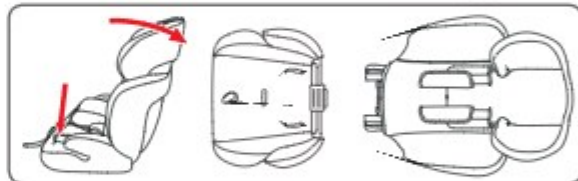

Backrest removal: Disconnect the the backrest and base, take out the backrest's hook from the rubber band of the seat cover of the base, Separate the backrest from the base, and the base can used with Group 3 modes.

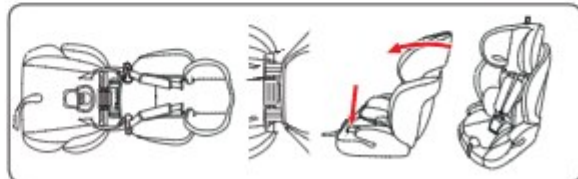


Seat assembly: Remove the seat from the carton, remove plastic bags, Lay the seat flat as shown. Hang the rubber band of the base seat cover to the backrest's hook, Insert the two backrest's hooks into the seat hole. Insert the buckle, tighten the adjusting belt, and the seat assembly is completed.

## Group III Installation with ISOFIT and car belt.

### Group III

Suitable for  
children weighing  
**22-36 kg**  
(5 to 12 years old)



Install the ISOFIT interface then pull the car seat belt out.



Pass the lap belt under the armrest of the base, diagonal belt above the armrest of the base, insert the metal tongue of car belt into the car seat buckle until you hear a clear "click"



Tighten the 3-point seat belt.



Tips: Before using the safety seat, make sure the safety seat is firmly installed. The seat belt is not twisted.

## Group II Installation with car belt

### Group II

Suitable for  
children weighing  
**15-25 kg**  
(3 to 6 years old)



Place child safety seat in car seat, Pull out the seat belt entirely.



Place the child in the seat, adjust the headrest in the suitable height.



Shoulder belt must pass through shoulder belt guide, and route lap belt under armrest on seat base, make sure that the car seat belt doesn't hurt child's neck.



Insert the metal tongue of car seat into the car seat buckle until you hear a clear "click".



Tighten the seat belt, check and make sure there is no twist of the belt.


## Group III Installation with car belt .

Group III

Suitable for  
children weighing

**22-36** kg

(5 to 12 years old)



Place child safety seat in car seat, Pull out the seat belt entirely.



Pass the diagonal belt and lap belt under the armrest of the base, insert the metal tongue of car belt into the car seat buckle until you hear a clear "click".




Tighten the 3-point seat belt.




Tips: Before using the safety seat, make sure the safety seat is firmly installed. The seat belt is not twisted.

## Detach soft goods


Remove the shoulder strap and shoulder protector from the child seat first (see page 13)



Remove the headrest cloth cover.



Take off the backrest cover by raising the cover from down to up.



Remove the base cover by raising the cover from down to up.

**Seat cloth cover mounted:**  
To assemble soft goods, reverse the steps above.

## Maintenance

### Safety seat maintenance

After removing foam of infant insert, please store it somewhere that the child can not access it.

-Please wash the soft goods with cold water under 30°C.

-Do not iron the soft goods.

-Do not bleach or dry clean the soft goods.

-Do not use undiluted neutral detergent, gasoline or other organic solvent to wash the child restraint. It may cause damage to child restraint.

-Do not twist the goods to dry with great force, it may leave the soft goods with wrinkles.

-Please hang dry the soft goods in the shade.



## Warning

Child restraint system (safety seat) without cloth cover cannot be used.

### Safety seats save.

Please always check the seat parts are complete, the seat is in good condition to reduce the chance of accidents.

Please remove the child restraint from the vehicle seat if not in use for a long period time. Put the child restraint in the shade and somewhere your child can not access it.


Please do not leave the seat in a cold or hot, humid environment for long periods of time.

Please keep this instruction well for checking.

## Post-accident treatment

In the event of a violent collision and accident, please replace it with a new seat. If you have any other questions, please contact the distributor or manufacturer.

## Dimension Info

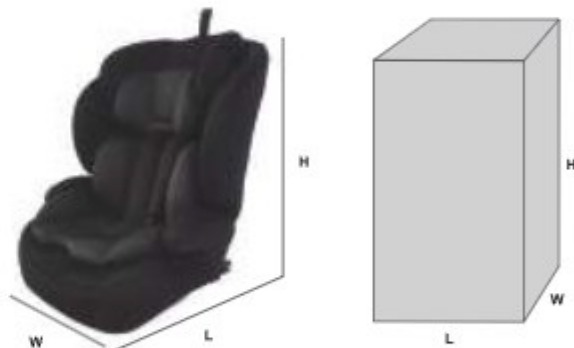

LENGTH	52 CM	CARTON LENGTH	44.5 CM
WIDTH	48 CM	CARTON WIDTH	30.5 CM
HEIGHT	68 CM	CARTON HEIGHT	57.5 CM
WEIGHT	6 KGS		