



POLO TRAVEL SYSTEM INSTRUCTION MANUAL



CHELINOBABY GROUP OF COMPANIES,
NO. 12 KIMBERLITE ROAD, THETA EXT 5,
BOOYSENS RESERVE, JHB.2091.SA.
Tel: +2711 8352520

www.chelinobaby.co.za



Catalogue

Component introduction-----	2
Installation introduction-----	3
Function introduction-----	6
Attention-----	12

Maintenance

To ensure your child from accidental injury please regularly do the inspection and maintenance of this stroller. Please regularly check if there are screws loose, damaged parts or structure breakage, if necessary, replace broken parts. When disassembling, carefully follow the operating instructions in order to avoid unnecessary damage.

When cleaning the fabric on the stroller, clean the stain directly with the brush or other cleaning equipment. For other parts' cleaning, please use household soap or neutral detergent.

Pull the button to adjust the angle of the carrycot



WARNING

Keep all the plastic bags and small components away from the child to avoid possible suffocation and injury.

Installation introduction

1. Unfolding the frame

Take out the frame, lift up the push bar to unfold the frame.



2. Front wheels assembly

Lift up stroller frame front axle tube and push down the button. Push up until you hear an audible “click” to indicate the front wheel is locked into position. Repeat for the second wheel.



3. Rear wheels assembly

Push down the button with one hand, insert rear wheel axle until you hear an audible “click” to indicate the wheel is locked into position. Repeat for the second wheel.



Installation introduction

4. Seat and front bar installation

Press down the white button on both sides of the stroller, insert into the frame posts until you hear an audible "click" sound. Insert the front bar into the slot above the white button.



WARNING

In order to avoid injury, when the baby sitting on the seat, do not move or adjust the stroller.

5. Canopy Adjustment



Function introduction

1. Carrycot adjustment button

Press the round buttons on both sides, rotate the carrycot to adjust the seat position.



2. Adjusting the position of the carrycot, face forward

The mother pushes the stroller at the back, when use sitting and sleeping position, please use the clutch to recline seat.



clutch



Adjusting the position of the carrycot. Turning it around, the baby is facing the mother. When use sitting and sleeping position, please use the clutch to adjust seat.



Function introduction

3. Change the carrycot to sitting status

Tighten the remove adjustment belt, adjust the backrest angle, it will be changed to the sitting position.



Carrycot reinforcement support rod: First, fix the seat bottom fixing the belt on the reinforcement support rod, and then buckle up on the button to prevent the rod of the bottom of the seat from suddenly

opening.

4. Sleeping status

When the carrycot being opened, Adjust the carrycot to the horizontal direction, untie the two buttons at the bottom of the carrycot, and then adjust to the sleeping mode.



Function introduction

5. Shutdown instructions - Foldable carrycot

As shown in the figure, press and hold the small circular buttons on both sides of the carrycot then fold the carrycot. Open the carrycot with one hand, until you hear the sound "click", and the carrycot opens completely



Push the two buttons by the side of carrycot



Fold the carrycot from the middle



Pack up the carrycot

6. Canopy adjustment

The canopy can be adjusted into 3 positions according to the weather and the status of the baby.



7. Five point safety belt

- 1) Insert the arm safety belt into the waist belt buckle.
- 2) Then lock it into the main buckle with the red button.
- 3) Press the red button to unlock the safety belt.



Inserting status



Locking status



One key release

Function introduction

8. Carrycot ventilation window

Three large mesh ventilation window. The carrycot is ventilated and breathable in summer, and warm in winter.



Mesh ventilation window Breathable in summer Wind-proof in winter

9. Front wheels direction universal and fixing

To fix the direction of the front wheels, align front wheels in a straight forward position and press down the front wheel lock, the front wheels can only move straight forward and backward. Lift up the front wheel direction lock, direction of the front wheels can be universal.



Universal rotating



Fixing direction

10. Rear wheels one touch brake

Picture 1: Lift up the rear wheel axle to release the brake, then the stroller can move freely. Picture 2: The locking status, the stroller unable to move.



Non-braking model



Braking model

Function introduction

Easy folding the stroller in 3 steps

- 1) Slide the second locking key with your right hand thumb, while press the other key with the index finger and middle finger.
- 2) Push down the frame to fold the stroller.
- 3) Lock the folding key to prevent the stroller accidentally open.



Push the handle gently



Folding safety belt

Installation of the child safety seat

- 1) Install the adapters into the plastic holders on both sides of the car seat and press down until a click is heard.
- 2) Pull upwards the child safety seat to ensure that it is firmly fixed to the stroller's chassis.



Matters needing attention



- Important –Red carefully and keep for future reference.
- Never leave the child unattended.
- Ensure that all the locking devices are engaged before use.
- To avoid injury ensure that child is kept away when unfolding and folding this product.
- Do not let the child play with this product.
- Use a harness as soon as the child can sit unaided.
This seat unit is not suitable for children under 6 months.
- Always use the restraint system.
- Check that the pram body or seat unit or car seat attachment devices are correctly engaged before use.
- This product is not suitable for running or skating.
- That the parking device shall be engaged when placing and removing the children.
- That any load attached to the handle and/or on the back of the backrest and/or on the sides of the stroller will affect the stability of the stroller .

Matters needing attention

WARNING

- Only replacement parts supplied or recommended by the manufacturer/distributor shall be used. This product is suitable for a child who cannot sit up by itself, roll over and cannot push itself up on its hands and knees. Maximum weight of the child: 22kgs.
- For pram bodies, a statement that carrying handles shall be left out of the pram body during use.
- Do not let children stand on the seat.
- Two or more persons are not allowed to use the stroller at the same time
- Please do not use in rough places, stairs and other dangerous places.
- Keep the plastic cover away from the baby to avoid suffocation.
- Keep away from fire.

Matters needing attention

WARNING

Do not place heavy objects at the top of the stroller.

Do not use other non-original parts or accessories.

For dust and general stains, it is recommended to use a wet cloth to scrub quickly and dry quickly. The seat cloth and the sunshade canopy are not machine washable.

In order to avoid damage to the fabric surface, Do not brush the fabric with force.

Put the fabrics in a ventilated place to dry after washing, do not expose.


Due to variation on the styles and designs of our products, the photographs and illustrations shown in this manual are generic. Therefore products fabric, colour and design may vary from images shown, Chelino reserves the right to alter products specifications.

Instruction Manual For Infant Carrier

(For the safety of baby , please read carefully before using the infant carrie)

ECE R129/03

The height of the children ranges from 40cm to 87cm.
The weight of the children should be less than or equal to 13kgs.

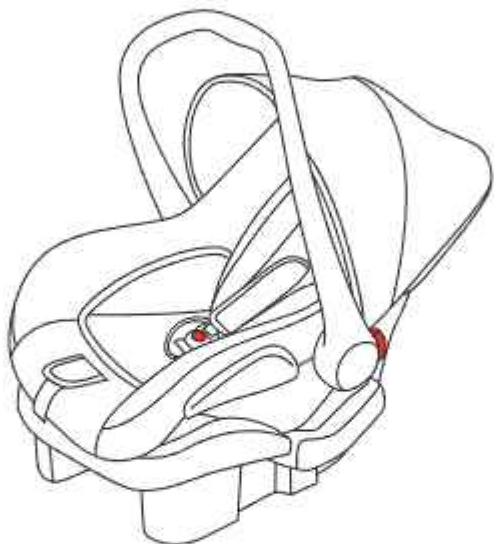

CHELINOBABY GROUP OF COMPANIES.
NO. 12 KIMBERLITE ROAD, THETA EXT 5,
BOOYSENS RESERVE, JHB.2091.SA.
Tel: +2711 8352520

www.chelinobaby.co.za



1. Vital information-READ NOW

For your child's safety, please read these instructions carefully before use and keep them for future reference. Failure to follow the instructions contained in this manual could result in serious injury to your child.

1. The customer can write to the address printed on the box to obtain future information on fitting the child restraint in specific cars.
2. The rigid items and plastic parts of a child restraint must be so located and installed that they are not liable, during everyday use of the vehicle to become trapped by a movable seat or in a door of the vehicle.
3. Any straps holding the restraint to the vehicle should be tight, that any straps restraining the child should be adjusted to the child's body, and that straps should not be twisted.
4. The instructions can be retained on the child restraint for its life period.
5. Do not use any load bearing contact points other than those described in the instructions and marked in the child restraint.
6. Ensuring that any lap straps is worn low down, so that the pelvis is firmly engaged, shall be stressed.
7. The device should be changed when it has been subject to violent stresses in an accident.
8. It is dangerous to make any alterations or additions to the device without the approval of the competent authority, and a danger of not following closely the installation instructions provided by the child restraint manufacturer.
9. When the chair is not provided with a textile cover, it should be kept away from sunlight, otherwise it may be too hot for the child's skin.
10. Children must not be left in their child restraint system unattended.
11. For the reason of safety, the child seat must be fixed inside the vehicle even if you do not put your child inside the child seat.

12. Any luggage or other objects liable to cause injuries in the event of a collision shall be properly secured.

13. The child restraint must not be used without the cover.

14. The seat cover can not be replaced with any other than the one recommended by the manufacturer, because the cover constitutes an integral part of the restraint performance.


15. Never use a second-hand product, as you can never be certain what has happened to it.

16. Do not place rear-facing child seat on front seat with airbag. Death or serious injury can occur.

17. Do not use this child seat in the home. It has not been designed for home use and should only be used in your car.

18. Please identify unsatisfactory position of the adult safety belt buckle relative to the correct point of the child safety seat, if in doubt, please contact the child seat manufacturer.

2. Type of applicable car safety belt to install

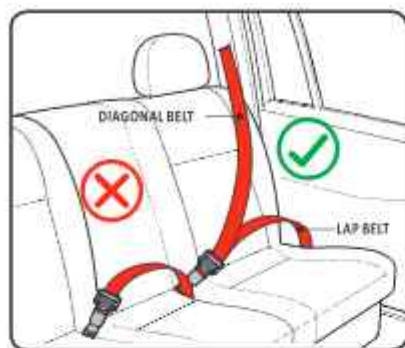

Only suitable if the approved vehicles are fitted with 3 point safety-belts, approved to UN/ECE Regulation No.16 or other equivalent standards.

3. Using safety seat in this way

Forward facing	Error
Rearward facing	Correct
With 2 point belt	Error
With 3 point belt	Correct
On front passenger seat	Error
On outer rear seat	Correct
On centre rear seat	Error

3.1 Please carefully implement the Country Traffic Safety Regulations


- Do not install the child safety seat at the front seat with airbag.
- Please read the instruction manual carefully that how to use the airbag.

NOTICE




- ✓ You can install this position
- ✗ Unable to install the position
- ⊛ Do not install the child safety seat at the front seat with air bag.
- ⊛ Only with the three point safety belt, can this location.

4. Major Parts of Infant Carrier

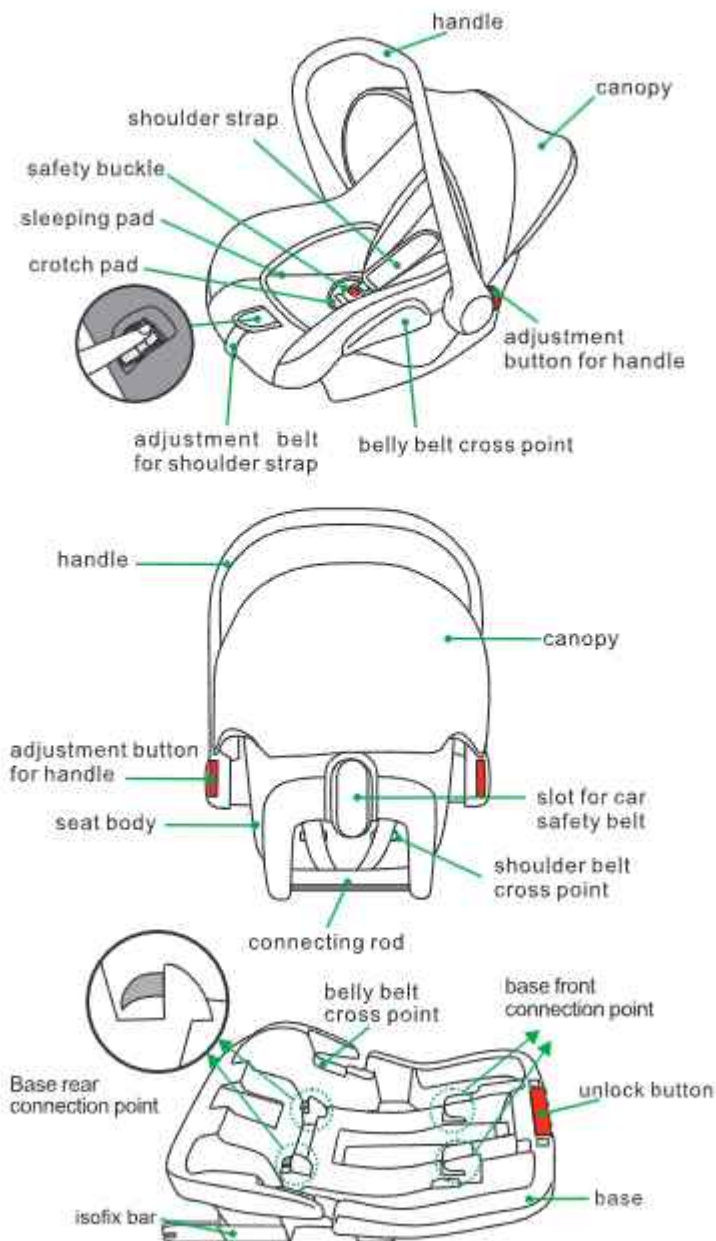


5. Adjustment of handle

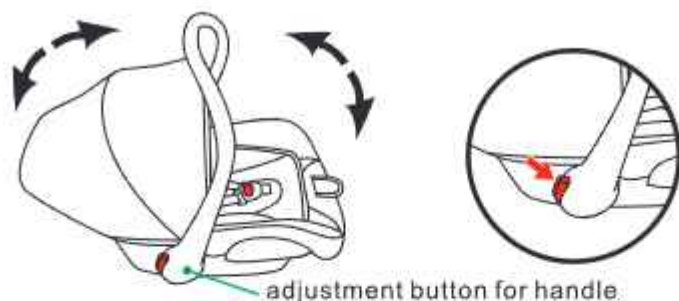

Press the red adjustment button at both sides near the handle at the same time, and meanwhile rotate handle to desired position. You will hear a sound of "click" if the handle is adjusted to right place. This product has 3-position of adjustment to be selected.

6. Use of safety buckle

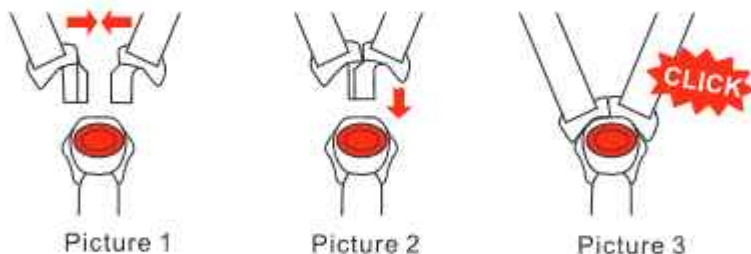

As picture 1-3 shows:

First step, put the two buckle tongue together. Second step, push buckle tongue into the buckle slot. Third step, it will give a sound of "click" if the buckle is locked safely. Pull the buckle tongue to check if they are locked firmly. Fourth step, press red button on the buckle and the buckle will pop out automatically.

*The right and left buckle tongue must be joined closely before pushed into the slot. Red button on the buckle has been tested according to safety protection standard that children don't have enough strength to press down the button.

7. How to adjust the height of shoulder strap

For the safety of your child, please check the height of the shoulder strap frequently! Child's shoulder should always be under the hole of the shoulder strap.



Too high




Too low



Right

8. Adjustment of the height of shoulder strap

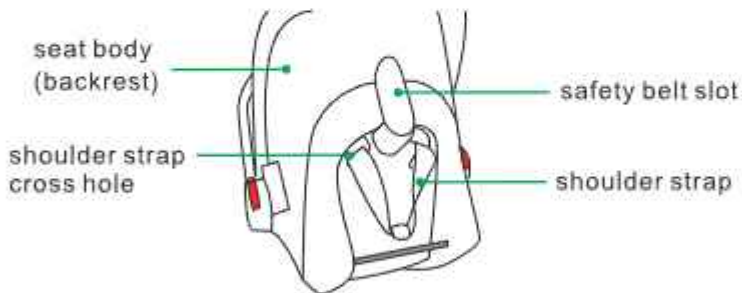


Step 1: Press shoulder strap adjustment button and pull out part of two straps, then release belt buckle of the carrier and cross the buckle through the shoulder strap cross hole.



Step 2: Cross the buckle through the above hole from back to front. Third step, repeat the above step to enable another shoulder strap to the new position. Make sure two shoulder strap pass through the two shoulder strap hole at the same height.

There are 2 positions for shoulder strap, please select proper position for your child.


9. How to install the Infant Carrier on the base

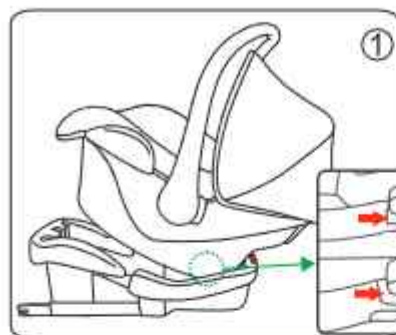


Step 1: First, complete the connecting rod at the rear end clip into the two connection points at the front of the base, confirm that the installation is firm

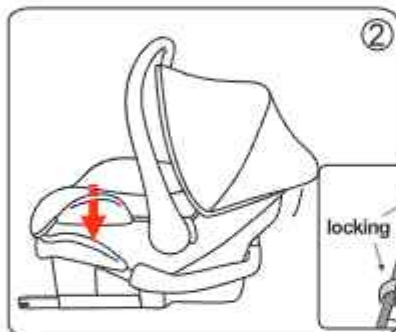

Step 2: Then, complete the connecting rod at the front end clip into the two connection points at the back of the base.



10. Unlock instructions

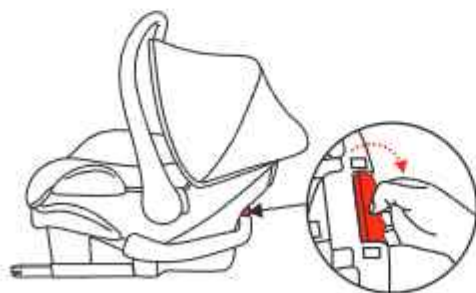

Press unlock button to release the base



11. How to adjust shoulder strap



Child safety belt can be released by the button fixed in front of seat. Press down on the label marked "Press" as you grip the two shoulder straps with your other hand. Pull the shoulder straps forward to adjust tightness of the restriction system.



Insert buckle tongue into slot after child is seated in the car seat, then adjust belt length at crotch position. Pull the adjustment belt out and make the shoulder strap bind child firmly.

The shoulder strap should be adjusted to a proper tightness degree. A too tight shoulder strap will cause discomfort and a too loose shoulder strap can be dangerous.

12. Maintenance

These tips are very important, please read carefully and keep in mind.

1. Take off the fabric cover and wash with neutral detergent under 30 degree Celsius.

Centrifugal machines and dissolvent are not allowed to use on it.

2. To avoid ageing of plastic, please keep it in a cool place if you do not use it for long time.

3. Please fix it with car safety belt if you put it in car.

4. Avoid direct sunshine exposure.

5. The infant carrier must be replaced when it has been subject to violent stresses in an accident.


TOP TIP: Infant carrier must be used with fabric cover. Because fabric cover is an indispensable part during protection procedure.

Dimension info



LENGTH	88 CM	FOLDED LENGTH	74 CM
WIDTH	61 CM	FOLDED WIDTH	61 CM
HEIGHT	110 CM	FOLDED HEIGHT	39 CM

WEIGHT	8.8 KGS
---------------	----------------

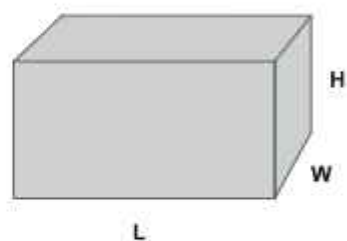

CAR SEAT LENGTH	67 CM	CARTON LENGTH	75.5 CM
CAR SEAT WIDTH	40 CM	CARTON WIDTH	45 CM
CAR SEAT HEIGHT	55 CM	CARTON HEIGHT	47.5 CM

WEIGHT **3.15 KGS**

ChelinoBaby®

Stores: ChelinoBaby – Ormonde – JHB
ChelinoBaby – Fourways – JHB
ChelinoBaby – Woodmead Square – JHB
ChelinoBaby – Greenstone – JHB
ChelinoBaby – Centurion – Pretoria
ChelinoBaby – Menlyn – Pretoria
ChelinoBaby – Kolonnade – Pretoria
ChelinoBaby – Gateway – Durban
ChelinoBaby – Cavendish Square – Cape Town
ChelinoBaby – Nelspruit – Mpumalanga
ChelinoBaby – Online – www.chelinobaby.co.za



Imported for :

ChelinoBaby Group of Companies.

No. 12 Kimberlite Road , Theta Ext 5 ,
Booyens Reserve , JHB , 2091. SA.

Tel: +2711 8352520

Info: info@chelino.co.za