

ChelinoBaby®

Stores: ChelinoBaby – Ormonde – JHB
ChelinoBaby – Fourways – JHB
ChelinoBaby – Woodmead Square – JHB
ChelinoBaby – Greenstone – JHB
ChelinoBaby – Centurion – Pretoria
ChelinoBaby – Menlyn – Pretoria
ChelinoBaby – Home Hyper City – Pretoria
ChelinoBaby – Gateway – Durban
ChelinoBaby – Cavendish Square – Cape Town
ChelinoBaby – Nelspruit – Mpumalanga
ChelinoBaby – Online – www.chelinobaby.co.za



Imported for :

ChelinoBaby Group of Companies,
No. 12 Kimberlite Road , Theta Ext 5 ,
Booyens Reserve , JHB , 2091. SA.
Tel: +2711 8352520
Info: info@chelino.co.za

Chelino®

ARIES III INSTRUCTION MANUAL



Please read the instruction manual
before using the child car seat



Group I,II,III

Group I: 9kg-18kg(approx.9 months-4 years)

Group II: 15kg-25kg(approx.3 years -7 years)

Group III: 22kg-36kg(approx.6 years -12 years)


Universal ECE R44/04

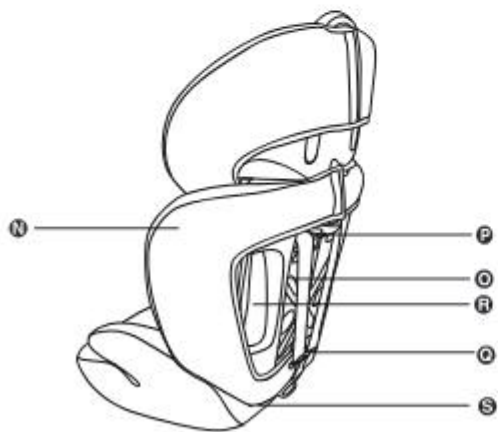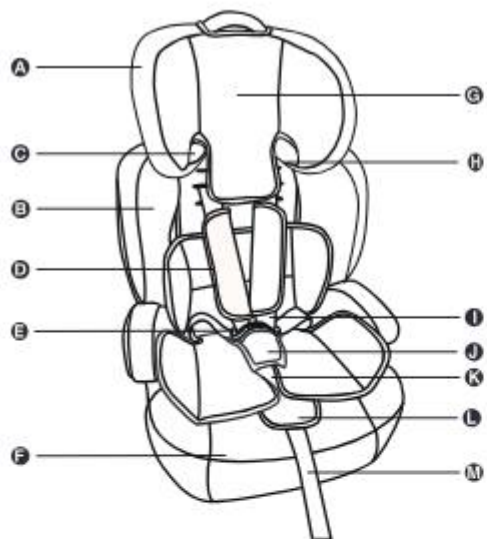


1

2

3

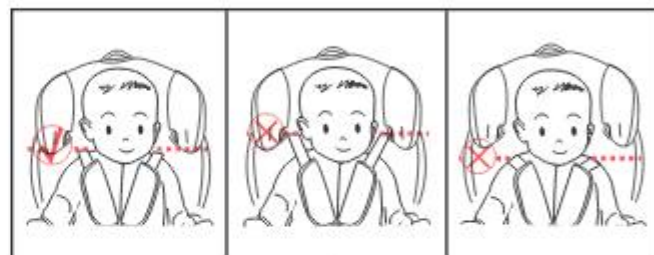

4

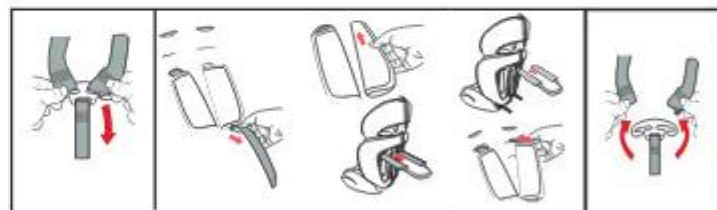

5

6

7



8



9



10



11

12

13

14




15

16

17

18




19



20




21

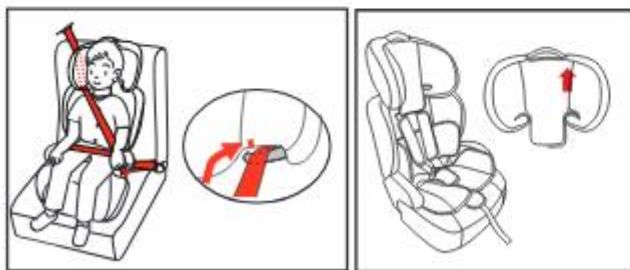


22

23

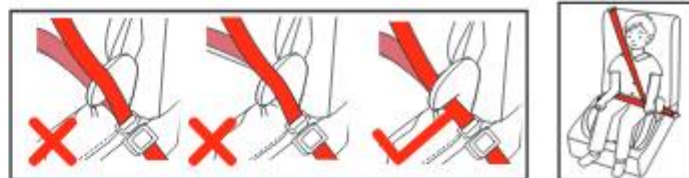

24


25

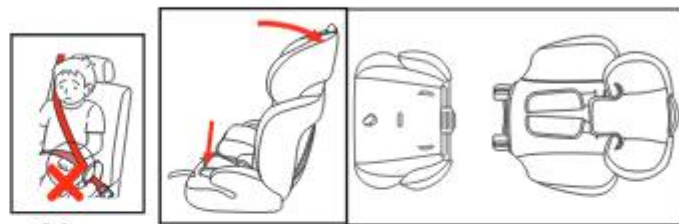

26


27

28

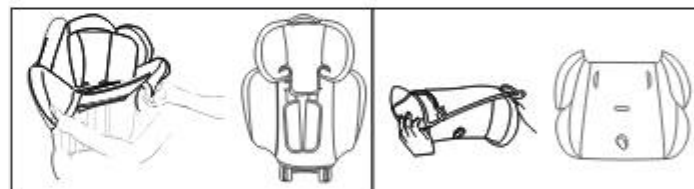

29

30

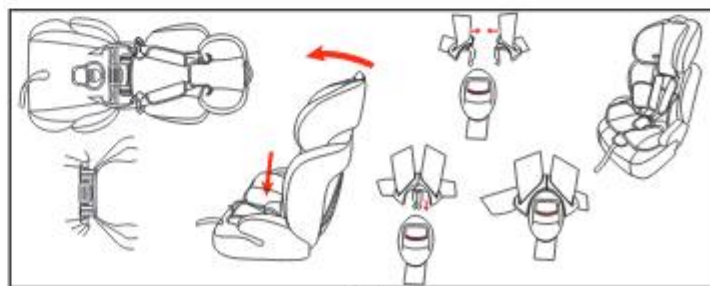

31

Table of Contents:

1. Introduction.....	2
2. Suitability.....	2
3. Safety advice.....	2-3
4. Vehicle application.....	3-4
5. Components overview.....	4
6. Adjusting the belt system and headrest to the size of your child.....	4-5
7. Installing your child car seat for Group I(9kg-18kg).....	5
8. Securing your child in the car seat for Group I(9kg-18kg).....	5-6
9. Installing your child car seat and securing your child for Group II(15kg-25kg).....	6-7
10. Installing your child car seat and securing your child for Group III (22kg-36kg).....	7-8
11. Assembling the car seat.....	8
12. Removing the cover.....	8
13. Cleaning the cover.....	8

1. Introduction

Thank you for choosing our child car seat. In order to gain the most comprehensive protection of your child, please read carefully and follow the instruction for correct installation and retain for future use. If you have any questions, please contact us.

This is a "Universal" child car seat. It conforms to ECE R44/04 for general use in vehicles. It will fit most, but not all vehicle seats.

2. Suitability

The child car seat is suitable for children from 9kg to 36kg, for details please see below:

Group I: 9kg(9 months) to 18kg(4 years)

Group II: 15kg(3 years) to 25kg(7 years)

Group III: 22kg(6 years) to 36kg(12 years)

The product can only be used in vehicle that is fitted with 3 point safety belt approved to ECE-16 or the equivalent standard. Never use a 2 point safety belt.

The car seat must only be installed by using a lap and diagonal seat belt.



 Correct Fitting/ Suitable


 Incorrect Fitting/ Not Suitable


3. Safety advice

- (1). Please read the entire instruction manual thoroughly before using the child car seat . Improper installation can endanger the life of your child.
- (2). Under no circumstances should the seat be installed on a passenger seat equipped with an airbag. This can be very dangerous.
- (3). It is most important that the seat belt is correctly routed.
- (4). Never make unauthorized alterations or additions to the product.
- (5). Never use the child car seat if it has been in an accident, or if it has become badly worn.
- (6). Do not leave your children in the seat unattended at any time.
- (7). Child car seat parts may become hot in direct sunlight. Cover with a sheet to prevent this.
- (8). Make sure that your child never plays with the buckle as the buckle is not fully tamperproof.
- (9). Ensure that all other passengers, luggage and loose objects are properly secured.
- (10). Never use the child car seat without cover. Only covers approved by manufacturer can be used.
- (11). The child car seat must be secured with the car seat belt when not in use.
- (12). In an emergency your child can be released quickly by pressing the red button on the seat belt buckle.
- (13). Store this child car seat in a safe place when it is not being used. Avoid placing heavy objects on it.
- (14). Most accidents occur on short trips, so do not be tempted to avoid using the seat simply because you are not travelling very far.
- (15). Make sure to keep plastic bag long distance from your child as it is likely to cause suffocation.
- (16). Do not expose the child car seat to any corrosive substance. Use wet towel to clean the plastic body instead of any solvent when the plastic body is dirty.
- (17). Make sure the child car seat belt is adjusted to suitable position and the belt can't be twisted.
- (18). It's very important to put any lap belt low down so that the pelvis is firmly stressed.
- (19). Do not use this product second hand as you never know its history.
- (20). Before use this seat ,Please assemble the car seat according to pic.30,The detailed describe in page 8.

4. Vehicle Application :



 Not allowed to install child car seat.

 Be careful to install child car seat. Installation is permitted only if there is 3-point belt.The seat may not be installed in the area of effect of an airbag.

 Safe to install child car seat.

5. Components overview(fig.1)

A-Headrest cover	B-Backrest
C-Belt guide(for group II , child from 3-7 years old)	E-Harness buckle
D-Shoulder pads	F-Seat base
G-Headrest	H-Belt guide(for group II ,child from 3-7 years old)
I -Shoulder straps	J-Crotch pad
K-Crotch belt	L-Shoulder strap adjust button
M-Harness adjust strap	N-Backrest cover
O-Shoulder straps hole	P-Shoulder pads fastener belt
Q-Metal yoke	R-Belt guide(for group I)
S-Rotate bar	

6. Adjusting the harness system and headrest to the size of your child

6.1 Releasing the harness system

Press the shoulder strap adjust button(L) with one hand and pull the shoulder straps to release it.(fig 1)

Important note: For Group 2,3 without harness system, you can directly do as 6.3.

6.2 Adjusting the harness system

⚠ Make sure that the harness is on the same height as your child's shoulders.

Otherwise, move the shoulder strap up or down to the correct slot. (fig.4)

6.2.1 Undo the shoulder straps(I) out from the metal yoke(Q). (fig.5)

6.2.2 Pull both the shoulder pads and shoulder straps out from the slot and re-insert them into the slot that corresponds to the height of your child shoulders. Ensure the straps are not twisted.(fig.6)

6.2.3 Put the 2 shoulder straps back into the metal yoke(Q). (fig.7)

6.3 Adjusting headrest

6.3.1 Pull or push the hole of the headrest to adjust the height of the headrest. (fig.23)

Warning!

Make sure the harness is on the same height as your child's shoulders.

Otherwise, adjust the harness on the suitable height. (fig.4)

7. Installing your child car seat for Group I(9kg-18kg)

7.1 Adjusting backrest to make sure it touches car seat closely

Put the car seat on car seat facing forward and adjust the backrest along the Rotate bar(S) to make the backrest touch closely the car seat. (fig. 3)

7.2 Routing the diagonal and lap belt correctly

Make sure there is no twist of car belt. Route the diagonal belt through belt guide(A) and lap belt under armrest on seat base. Guide the metal tongue of car belt through the hole on backrest on one side over the harness system on backrest and go through the hole on backrest on another side. Then put the diagonal belt above armrest through the space between backrest and seat base while lap belt under armrest.(fig.8)

7.3 Tightening the child car seat

7.3.1 Check and make sure there is no twist of the belt. Insert the metal tongue of car belt into the car seat buckle until you hear a clear "click". (fig.9)

7.3.2 Tighten the seatbelt by pulling in the direction of the seatbelt reel. (fig.10)

8. Securing your child in the car seat for Group I(9kg-18kg)

8.1 Loosening the shoulder straps

Press the shoulder strap adjust button(L) with one hand, in the meanwhile, pull the shoulder straps(I) with another hand to loose it. (fig.1)

8.2 Opening the buckle

Hold the two buckle latches with one hand, and another hand holds the main part of the buckle with thumb pressing the red button until the two tongues pop out from the buckle.(fig.11)

8.3 Seating your child in the child car seat

Put your child in the seat and put the shoulder pads on the shoulders of the child.(fig.12)

8.4 Locking the buckle

Guide the two buckle latches together and engage them into the harness buckle(E).(fig. 13)

Warning!

Make sure the two buckle latches are put together correctly and there is no twist of the harness.

8.5 Tightening the harness straps

Pull the harness adjust strap(M) until the shoulder pads(D) touches the chest of your child. (fig.14)

9. Installing your child car seat and securing your child for Group II(15kg-25kg)

9.1 Removing the harness system

9.1.1 Release the shoulder straps(I) and unhook it from the metal yoke(Q). (fig.15)

9.1.2 Pull the shoulder pads(D) and shoulder straps(I) out of the shoulders straps hole on the backrest (B). (fig.16)

9.1.3 Get both buckle latches out from the shoulder straps(I). Now you can remove the shoulder strap easily by pulling it from the seat base.(fig.17)

9.1.4 Removing harness buckle(E) and crotch pad(J)

9.1.4.1 Slide the metal plate which is used to fasten the harness buckle to the seat shell down on its edge through the strap slot.(fig.19)

9.1.4.2 Now both the buckle and crotch pad can be taken off from the seat shell.(fig.20)

Important note: It is suggested that the two buckle latches are inserted into buckle to avoid missing. (fig.21)

9.3 Seating your child in the child car seat

9.3.1 Adjust backrest to make sure it touches carseat closely.

Put the car seat on car seat facing forward and adjust the backrest along the Rotate bar(S) to make the backrest touch closely the carseat. (fig. 3)

9.3.2 Place your child in the child car seat.

9.3.3 Route the diagonal and lap belts correctly

9.3.3.1 Make sure there is no twist of car belt. Route the diagonal belt through the belt guide(C,H) for child in the meanwhile, route lap belt under armrest on seat base. (fig.22)

9.3.3.2 Make sure that both diagonal and lap belt must go under armrest. (fig.24)

9.3.3.3 Check and make sure there is no twist of the belt. Insert the metal tongue of carbelt into the carseat buckle until you hear a clear "click". (fig.9)

Warning! If your child's head grows out car seat headrest, please use the car seat as booster for Group III.

10. Installing your child car seat and securing your child for Group III(22kg-36kg)

10.1 Removing the backrest

10.1.1 Push backrest and seat unit apart. The seat may click loudly. The two section should come apart. Reattach the Velcro tab at the back of the booster seat if it has come undone. The booster seat is now ready to use. (fig.27,28)

10.2 Routing the diagonal and lap belts correctly

10.2.1 Make sure there is no twist of car belt. Route the diagonal belt on the shoulder of your child and lap belt under the armrest of car seat on one side. Make sure both diagonal and lap belt must go under armrest. (fig.24 , 25)

10.2.2 Check and make sure there is no twist of the belt. Insert the metal tongue of carbelt into the carseat buckle until you hear a clear "click". (fig.9)

Warning! Make sure your child arms are above both diagonal and lap belt. (fig.26)

11 Removing the cover

11.1 Remove the harness system, shoulder pads and crotch pad according to steps in 9.1.

11.2 Take off the backrest cover by raising the cover from down to up. (fig.29)

11.3 Remove the base cover by raising the cover from down to up. (fig.30)

12. Assembling the car seat

12.1 Take the seat out from the plastic bag and put the it flatly on floor .

12.2 Connect the elastic string on both sides of the seat base cover onto the hook on backrest, and put the hook in the hole of seat base. Then make the backrest from flat to upright position until you hear a clear click.

12.3 Guide the two buckle latches together engage them into the harness buckle until you hear a clear "click".

12.4 Pull the harness adjust strap. (fig.30)

13. Cleaning the cover

This child car seat must be used with seat cover as seat cover is an integral part of child car seat. It plays an important role in ensuring that the system works properly. Make sure that only approved replacement cover by manufacturer could be used.

Daily cleaning and care instruction for cover


*Hand wash the cover in cold or warm water.

*Do not dehydrate. Suggest to use towel to absorb water and hang dry.

Note:

*Do not use detergent that contains chlorine bleach.

*Do not use washing machine, dehydration machine and dryer.



Hand wash



Do not bleach



Do not iron



Do not dehydrate




Rub gently



Hang dry

Due to variation on the styles and designs of our products, the photographs and illustrations shown in this manual are generic. Therefore products fabric, colour and design may vary from images shown, Chelino reserves the right to alter products specifications.

14.Dimension Info

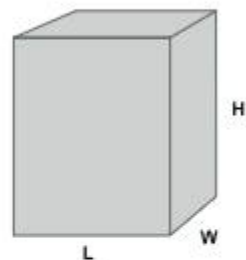

LENGTH	48 CM	CARTON LENGTH	42.5 CM
WIDTH	46 CM	CARTON WIDTH	27CM
HEIGHT	67 CM	CARTON HEIGHT	67.5 CM

WEIGHT	4.5 KGS
---------------	----------------